



HEAD OFFICE

GERMAGEN

Alte Heerstraße 64

47624 Weeze, Germany

From Germany 2025

Tel : +492832 50885306

Phone : +4917646074704

E-Mail : Info@germagen
-germany.de

Web : <https://www.germagen-germany.com/>

Scan me to visit our website



ISO 9001
ISO 14001
ISO 45001
IATF 16949



Intertek



Intertek



CATALOG 2025


HALOGEN LIGHT · LED WORK LIGHT · LED LIGHT BAR
AGRICULTURAL LED LIGHT BEACON · LED WARNING LIGHT
LED HEADLIGHT BULB · LED FLASHLIGHT · MOUNTING ACCESSORIES

LED HEADLIGHT BULB

We provide powerful performance led headlight bulbs for a wide range of models. Each model is available in a choice of color temperature. With high and low beam function led light bulb. High brightness output power is amazing. Pure copper tube chip and super high speed fan plus heat dissipation energy efficiency, life time is guaranteed. Intelligent decoding design ensures perfect matching and excellent performance, matching 90% of the models sold in the market. Plug and play design and ultra-compact inline drivers make installation very easy. We supply H1, H3, H4, H7, H11, 9005, 9006, 9012, D1, D2, D3, D4, D5, D8, etc. to fit all kinds of vehicle light models. All products have EMC R10, CE, RoHS certificates. As a manufacturer of led car lights we have been providing customers great led car bulbs with competitive price and stable quality.




Y1 Series

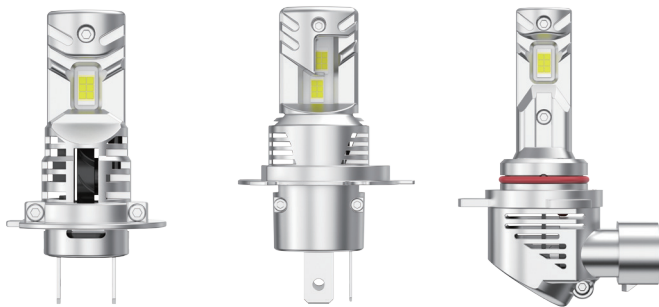

- **Voltage:** DC 9-32V
- **Power:** 30W
- **Flux:** 3000lm
- **Color Temperature:** 6500K
- **Model:** H1/H3/H4/H7/H11
9005/9006/9012

C2 Series

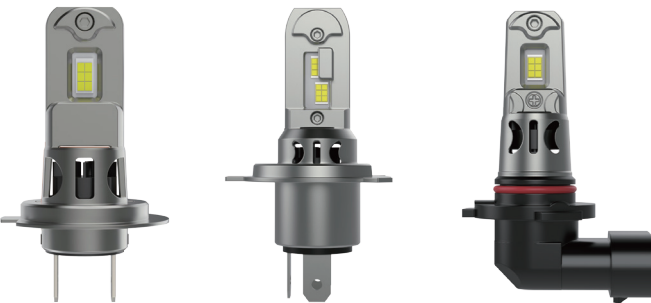

- **Voltage:** DC 12V
- **Power:** 33W
- **Flux:** 3500lm
- **Color Temperature:** 6500K
- **Model:** H1/H3/H4/H7/H11
9004/9005/9006/9007/9012

F4 Series



- **Voltage:** DC 12V
- **Power:** 16W
- **Flux:** 1700lm
- **Color Temperature:** 6500K
- **Model:** H1/H3/H4/H7/H11
9005/9006/9012

M29 Series



- Voltage: DC 9-32V
- Power: 55W
- Flux: 4500lm
- Color Temperature: 6500K
- Model: H1/H3/H4/H7/H11
9004/9005/9006/9007/9012

G5 Series




- Voltage: DC 9-32V
- Power: 60W
- Flux: 6000lm
- Color Temperature: 6500K
- Model: H1/H3/H4/H7/H11
9005/9006/9012

MINI01 Series



- Voltage: DC 9-32V
- Power: 35W
- Flux: 3100lm
- Color Temperature: 6500K
- Model: H1/H3/H4/H7/H11
9004/9005/9006/9007/9012

DS2 Series

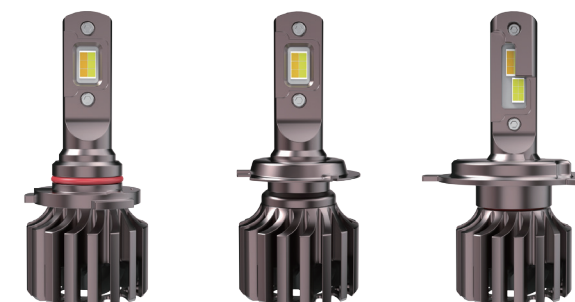

- Voltage: DC 9-32V
- Power: 50W
- Flux: 5000lm
- Color Temperature: 6500/4300/3000K
- Model: H1/H3/H4/H7/H11
9005/9006/9012

N50 Series




- Voltage: DC 9-32V
- Power: 50W
- Flux: 5300lm
- Color Temperature: 6500K
- Model: H1/H3/H4/H7/H11
9004/9005/9006/9007/9012

H15 Series




- Voltage: DC 12V
- Power: 50W
- Flux: 5000lm
- Color Temperature: 6500K
- Model: H15

D Series

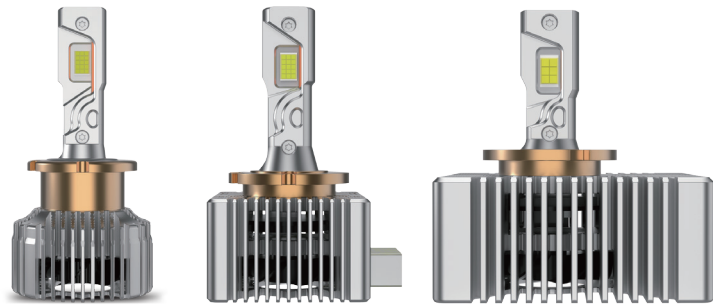

- Voltage: DC 12V
- Power: 40W
- Flux: 4500lm
- Color Temperature: 6500K
- Model: D1S/D2S/D3S/D4S/D5S/D8S

HS1-01

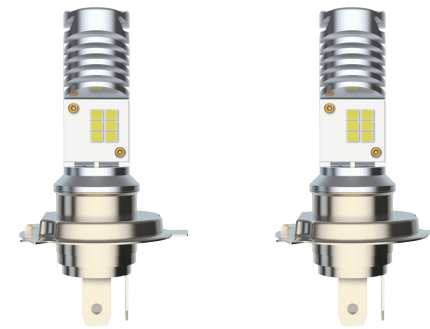


- Voltage: DC 9-32V
- Power: 10W
- Flux: 1200lm
- Color Temperature: 6500K
- Model: HS1

D Series 02




- Voltage: DC 12V
- Power: 40W
- Flux: 4500lm
- Color Temperature: 6500K
- Model: D2S/D4S

HS1-T

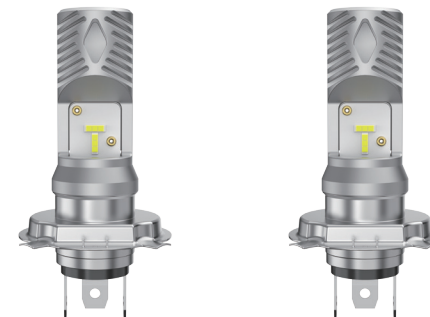


- Voltage: DC 9-32V
- Power: 14W
- Flux: 1300lm
- Color Temperature: 6500K
- Model: HS1

MINI LED BULBS

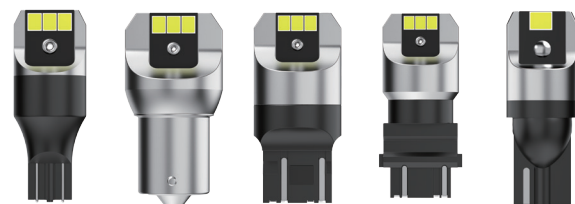

- Voltage: DC 9-32V
- Power: 2.5W
- Flux: 340lm
- Color Temperature: 6000K
- Model: T10/T15/T20/1156/1157
3156/3157/7440/7443

HS1-03

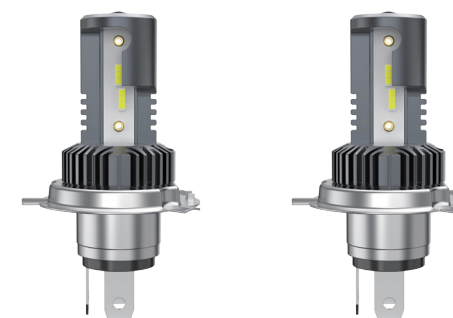

- Voltage: DC 9-32V
- Power: 20W
- Flux: 1100lm
- Color Temperature: 6500K
- Model: HS1

HALOGEN & INCANDESCENT BULB

For decades, we have been a trusted manufacturer and global supplier of high-performance automotive halogen and incandescent bulbs. With a long-standing history of excellence, we prides itself on producing bulbs of superior quality, durability, and reliability. Our extensive product range covers virtually every major vehicle make and model, ensuring comprehensive compatibility for customers worldwide. All our products are manufactured in compliance with international standards and hold E-Mark certification, guaranteeing safety and performance for international markets. Thanks to our consistent quality and precise engineering, we have built a strong reputation and maintained high sales volumes across the globe. We are committed to providing bright, dependable, and affordable lighting solutions that drivers have trusted for generations.



H1

BASE: P14.5s

VOLTAGE	WATTAGE	
12V	55W	★
12V	100W	
24V	70W	★
24V	100W	



H3

BASE: PK22s

VOLTAGE	WATTAGE	
12V	55W	★
12V	100W	
24V	70W	★
24V	100W	



H4

BASE: P43t

VOLTAGE	WATTAGE	
12V	60/55W	★
12V	100/90W	
24V	75/70W	★
24V	100/90W	



HS1

BASE: PX43t

VOLTAGE	WATTAGE	
12V	35/35W	★



H7

BASE: PX26d

VOLTAGE	WATTAGE	
12V	55W	★
12V	100W	
24V	70W	★
24V	100W	



H8

BASE: PGJ19-1

VOLTAGE	WATTAGE	
12V	35W	★
12V	100W	



H9

BASE: PGJ19-5

VOLTAGE	WATTAGE	
12V	65W	★



H11

BASE: PGJ19-2

VOLTAGE	WATTAGE	
12V	55W	★
24V	70W	★



H27W/2(881)

BASE: PGJ13

VOLTAGE	WATTAGE	
12V	27W	★



HIR1(9011)

BASE: PX20d

VOLTAGE	WATTAGE	
12V	65W	★



H16

BASE: PGJ19-3

VOLTAGE	WATTAGE	
12V	19W	★



HB3(9005)

BASE: P20d

VOLTAGE	WATTAGE	
12V	60W	★
12V	100W	



HIR2(9012)

BASE: PX22d

VOLTAGE	WATTAGE	
12V	55W	★



H15

BASE: PJ23t-1

VOLTAGE	WATTAGE	
12V	15/55W	★
24V	20/60W	



HB4(9006)

BASE: P22d

VOLTAGE	WATTAGE	
12V	51W	★
12V	100W	



H27W/1(880)

BASE: PG13

VOLTAGE	WATTAGE	
12V	27W	★



H11B

BASE: PGJY19-2

VOLTAGE	WATTAGE	
12V	55W	★



HB1(9004)

BASE: P29t

VOLTAGE	WATTAGE	
12V	65/45W	
12V	100/90W	



HB5(9007)

BASE: PX29t	
VOLTAGE	WATTAGE
12V	65/45W
12V	100/90W



H13(9008)

BASE: PJ26.4t	
VOLTAGE	WATTAGE
12V	60/55W ★
12V	100/90W



PS24W

BASE: PG20-3	
VOLTAGE	WATTAGE
12V	24W



PSY24W

BASE: PG20-4	
VOLTAGE	WATTAGE
12V	24W



PSX24W

BASE: PG20-7	
VOLTAGE	WATTAGE
12V	24W ★



P13W

BASE: PG18.5d-1	
VOLTAGE	WATTAGE
12V	13W ★



PSX26W

BASE: PG18.5d-3	
VOLTAGE	WATTAGE
12V	26W



HPC19W

BASE: PU20d-3	
VOLTAGE	WATTAGE
12V	19W



PW24W

BASE: WP3.3x14.5-3	
VOLTAGE	WATTAGE
12V	24W ★



PWY24W

BASE: WP3.3x14.5-4	
VOLTAGE	WATTAGE
12V	24W ★



PH19W

VOLTAGE	WATTAGE
12V	19W



PH24W C5

VOLTAGE	WATTAGE
12V	24W

HALOGEN &
INCANDESCENT BULB

HALOGEN &
INCANDESCENT BULB



P21W

BASE: BA15s

VOLTAGE	WATTAGE	
6V	21W	★
12V	21W	★
24V	21W	★



P21/5W

BASE: BAY15d

VOLTAGE	WATTAGE	
12V	21/5W	★
24V	21/5W	★



R10W

BASE: BA15s

VOLTAGE	WATTAGE	
12V	10W	★
24V	10W	★



H21W

BASE: BAY9s

VOLTAGE	WATTAGE	
12V	21W	★
24V	21W	★



P21/4W

BASE: BAZ15d

VOLTAGE	WATTAGE	
12V	21/4W	★
24V	21/4W	



PY21W

BASE: BAU15s

VOLTAGE	WATTAGE	
12V	21W	★
24V	21W	★



H10W/1

BASE: BA9s

VOLTAGE	WATTAGE	
12V	10W	★



H6W

BASE: BAX9s

VOLTAGE	WATTAGE	
12V	6W	★



PR21/5W

BASE: BAW15d

VOLTAGE	WATTAGE	
12V	21/5W	★
24V	21/5W	



R5W

BASE: BA15s

VOLTAGE	WATTAGE	
12V	5W	★
24V	5W	★



W3W

BASE: W2.1x9.5d

VOLTAGE	WATTAGE	
12V	3W	★
24V	3W	★



W5W

BASE: W2.1x9.5d

VOLTAGE	WATTAGE	
12V	5W	★
24V	5W	★



WY5W

BASE: W2.1x9.5d		
VOLTAGE	WATTAGE	

12V	5W	★
24V	5W	★



W16W

BASE: W2.1x9.5d	
VOLTAGE	WATTAGE

12V	16W



C5W

BASE: SV8.5		
VOLTAGE	WATTAGE	

12V	5W	★
24V	5W	★



P27W

BASE: W2.5x16d	
VOLTAGE	WATTAGE

12V	27W



WY16W

BASE: W2.1x9.5d		
VOLTAGE	WATTAGE	

12V	16W	★



W21W

BASE: W3x16d		
VOLTAGE	WATTAGE	

12V	21W	★
24V	21W	



T4W

BASE: BA9s		
VOLTAGE	WATTAGE	

12V	4W	★
24V	4W	★



R2

BASE: FEU(P45t)		
VOLTAGE	WATTAGE	

6V	45/40W	
12V	45/40W	★
24V	55/50W	★



W21/5W

BASE: W3x16d		
VOLTAGE	WATTAGE	

12V	21/5W	★



WY21W

BASE: W3x16d		
VOLTAGE	WATTAGE	

12V	21W	★



S2

BASE: BA20d		
VOLTAGE	WATTAGE	

6V	35/35W	★
6V	45/40W	
12V	35/35W	★
12V	45/40W	
24V	45/40W	
24V	50/50W	



S3

BASE: P26s		
VOLTAGE	WATTAGE	

6V	15W	
12V	15W	★



D1S

VOLTAGE	WATTAGE
12V	35W



D2S

VOLTAGE	WATTAGE
12V	35W



D3S

VOLTAGE	WATTAGE
12V	35W



D4S

VOLTAGE	WATTAGE
12V	35W



D2R

VOLTAGE	WATTAGE
12V	35W



D5S

VOLTAGE	WATTAGE
12V	35W

DASHBOARD BULB SERIES



BX8.3d 12V 2W



BX8.5d 12V 1.2W



B8.5d 24V 1.2W



BX8.4d 12V 1.2W



BX8.4d 12V 1.12W




BX8.4d 12V 2W



3Φ 14V 0.8W



4Φ 12V 1.2W



5Φ 14V 1.4W



5Φ 14V 1.4W



T4/1013



BX8.5DT 12V 1.2W

HALOGEN &
INCANDESCENT BULB

HALOGEN &
INCANDESCENT BULB


13124




Specification

Power	40W	Waterproof Rate	IP68
Operating Voltage	10-30V DC	Lens	PC
Lumen	4800lm	Housing	Die-Cast Aluminum
CCT	6000K	Mounting Bracket	304#Stainless Steel
Beam Pattern	Flood	Size(mm)	78.9mm*78.9mm*56mm
1 Lux Reading	1lux@84.5meters	Size(inch)	3.10''*3.10''*2.21''
Environment Temp.	-40~+60°C		


Dimensional Draw

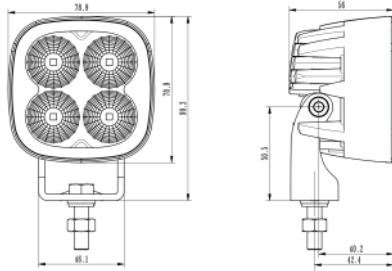

Isolux Chart

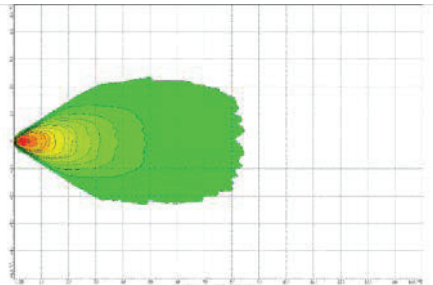


14124

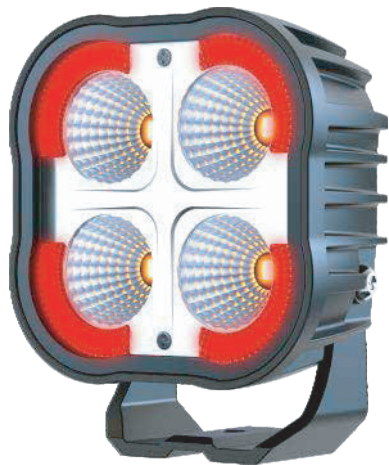


Specification

Power	48W	Waterproof Rate	IP68
Operating Voltage	10-30V DC	Lens	PC
Lumen	6800lm	Housing	Die-Cast Aluminum
CCT	6000K	Mounting Bracket	304#Stainless Steel
Beam Pattern	Flood,Tail Light	Size(mm)	104.8*104.3*58.1
1 Lux Reading	1lux@94meters	Size(inch)	4.13*4.11*2.29
Environment Temp.	-40~+60°C		

Dimensional Draw

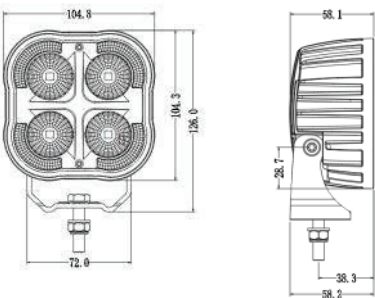

Isolux Chart

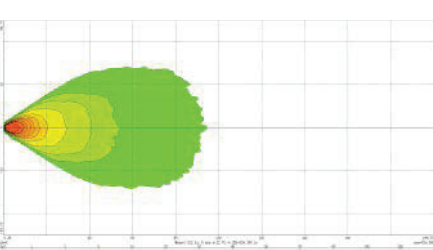


14132




Specification

Power	45W	Waterproof Rate	IP68
Operating Voltage	10-30V DC	Lens	PC
Lumen	6200lm	Housing	Die-Cast Aluminum
CCT	6000K	Mounting Bracket	304#Stainless Steel
Beam Pattern	Flood, Tail Light	Size(mm)	110.3*106.8*79.9
1 Lux Reading	1lux@93meters	Size(inch)	4.34''*4.21''*3.15''
Environment Temp.	-40~+60°C		

Dimensional Draw

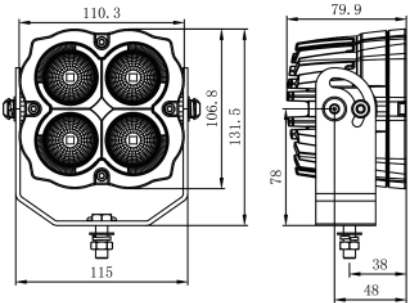

Isolux Chart

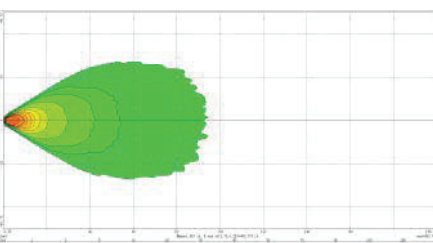


14133




Specification

Power	80W	Waterproof Rate	IP68
Operating Voltage	10-30V DC	Lens	PC
Lumen	9600lm	Housing	Die-Cast Aluminum
CCT	6000K	Mounting Bracket	304#Stainless Steel
Beam Pattern	Flood, Tail Light	Size(mm)	110.3*106.8*79.9
1 Lux Reading	1lux@116meters	Size(inch)	4.34**4.21**3.15"
Environment Temp.	—40~+60°C		


Dimensional Draw

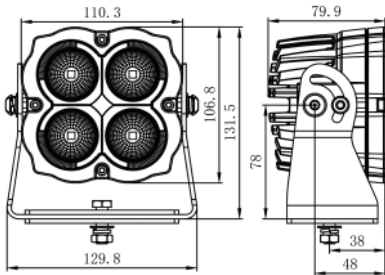


Isolux Chart

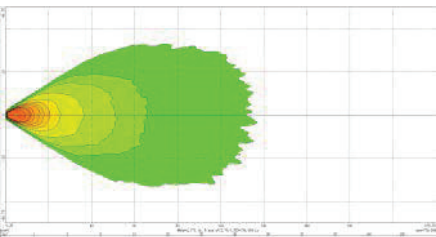

BS16 Series

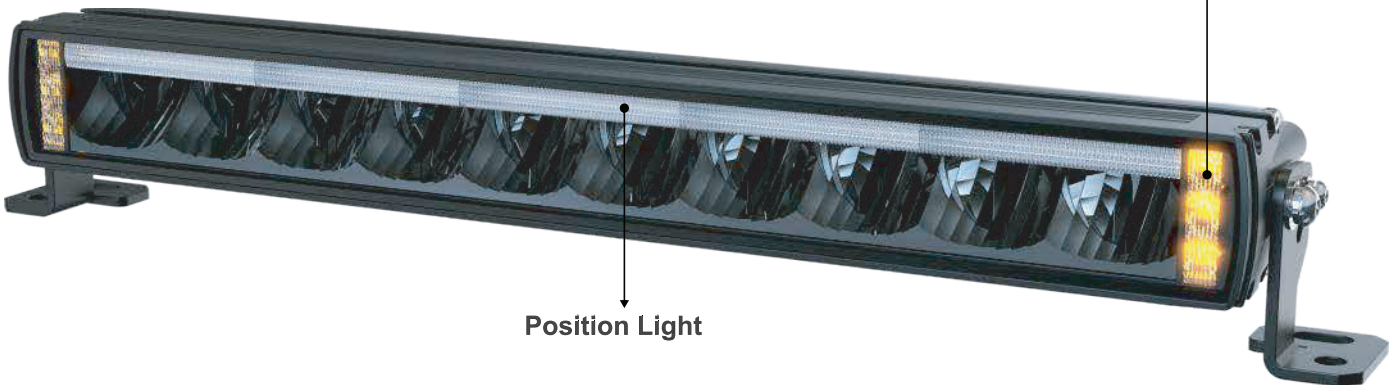

Dimensional Draw

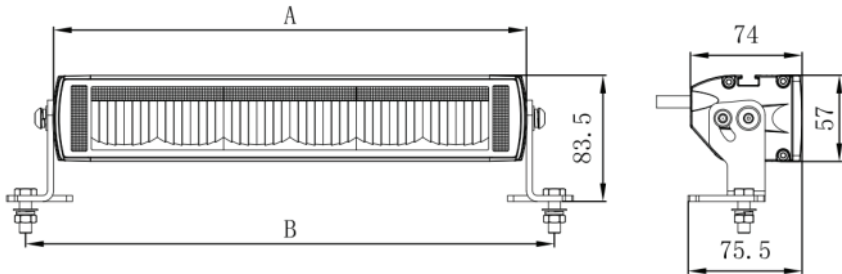


Specification


Operating Voltage	10-30V DC
CCT	6000K
Beam Pattern	Spot, Warning Light, Position Light
Environment Temp.	—40~+60°C

Model	Watt	Length	Lumen	A(mm)	B(mm)
BS16-4L	36W	9"	2800lm	225.5	262.5
BS16-6L	54W	11"	4300lm	313.5	350.5
BS16-10L	90W	21"	7200lm	489.5	526.5
BS16-18L	162W	31"	12960lm	841.5	878.5
BS16-24L	216W	41"	17280lm	1105.5	1142.5
BS16-30L	270W	51"	21600lm	1369.5	1406.5


13120

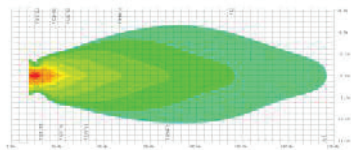

Spot Beam

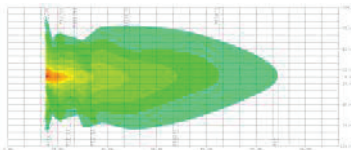

Flood Beam

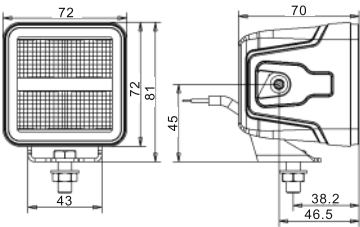

Unit: mm


Features

- High intensity 4Pcs*10W LED chips
- Edge-less design provides a modern look
- UV resistant imported PC lens
- Die-cast aluminum housing with superior heat dissipation
- 304#Stainless steel adjustable mounting bracket


Specification

Watt: 40W
Voltage: 10-30V DC
Light Output(measured): 2940lumens
Beam Pattern: Spot(1lux@200m), Flood(1lux@76m)
Color Temperature: 6000 Kelvin
Housing Material: Die-cast aluminum
Lens Material: PC
Size (inch): 2.83*2.83*2.75


13120DL

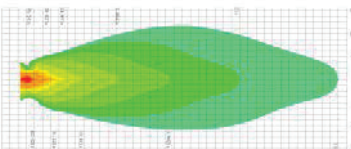

Spot Beam

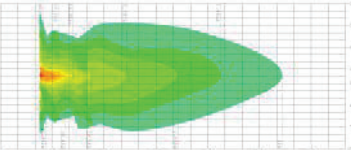

Flood Beam



Unit: mm



Features

- Amber+Red position light
- High power 4Pcs*10W LED chips
- Unique screwless design, more attractive
- UV resistant imported PC lens
- Corrosion resistant black powder-coated finish
- 304#Stainless steel adjustable mounting bracket

Specification

Watt: 40W
Voltage: 10-30V DC
Light Output(measured): 2802lumens
Beam Pattern: Spot(1lux@200m), Flood(1lux@76m)
Color Temperature: 6000 Kelvin
Housing Material: Die-cast aluminum
Lens Material: PC
Size (inch): 2.83*2.83*2.75

13121



Unit: mm

Features



- 4Pcs*10W high power led
- Great brightness with perfect beam pattern
- Even flood beam or concentrated spot beam
- Sleek design avoids sticking of dust and rain
- Black bracket for mounting options upright and pendant

Specification

- Watt: 40W
- Voltage: 10-30V DC
- Light Output(measured): 3000lumens
- Beam Pattern: Spot(1lux@320m), Flood(1lux@93m)
- Color Temperature: 6000 Kelvin
- Housing Material: Die-cast aluminum
- Lens Material: PC
- Size (inch): 3.19*2.95*2.95



16219

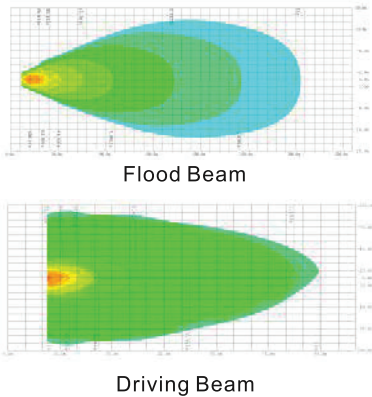

Unit: mm

Features



- 6Pcs*10W high intensity led chips
- Super bright and long distance illumination
- Sleek design avoids sticking of dust and rain
- 304 stainless steel U shape brackets
- Low profile mounting bracket

Specification

- Watt: 60W
- Voltage: 10-30V DC
- Light Output(measured): 3300lumens
- Beam Pattern: Driving Light(1lux@305m), Flood(1lux@100m)
- Color Temperature: 6000 Kelvin
- Housing Material: Die-cast aluminum
- Lens Material: PC
- Size (inch): 6.1*1.61*2.16



13121A

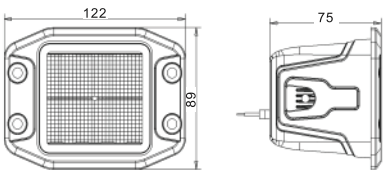

Unit: mm

Features



- 4Pcs*10w high power led
- Even flood beam or concentrated spot beam
- Smart constructed reflector without glare effect
- 304 stainless steel U shape bracket and screws
- Compact design applicable for multiple locations

Specification

- Watt: 40W
- Voltage: 10-30V DC
- Light Output(measured): 3000lumens
- Beam Pattern: Spot(1lux@320m), Flood(1lux@93m)
- Color Temperature: 6000 Kelvin
- Housing Material: Die-cast aluminum
- Lens Material: PC
- Size (inch): 4.8*3.5*2.95



16219A

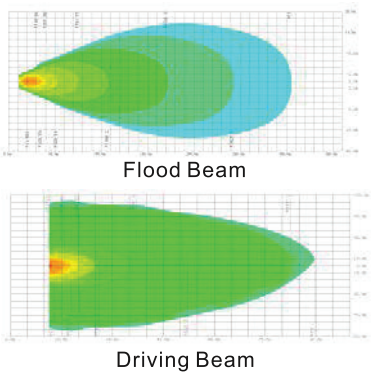

Unit: mm

Features

- 6Pcs*10W high intensity led chips
- Illuminate wide and long range light beam
- Sleek design avoids sticking of dust and rain
- Stronger aluminum housing for fast heat dissipation
- Compact design applicable for multiple locations

Specification

- Watt: 60W
- Voltage: 10-30V DC
- Light Output(measured): 3300lumens
- Beam Pattern: Driving Light(1lux@305m), Flood(1lux@100m)
- Color Temperature: 6000 Kelvin
- Housing Material: Die-cast aluminum
- Lens Material: PC
- Size (inch): 7.68*2.44*2.12



M1601



Features

- 9pcs*10W high intensity LED chips
- Flood beam provides perfect light pattern
- Breather vent plug balances the air
- Quake dampening withstands vibration
- 5mm thickness 304 stainless steel brackets

Specification

- Watt: 90W
- Voltage: 10-30V DC
- Light Output(measured): 8730lumens
- Beam Pattern: Flood(1lux@122m)
- Color Temperature: 5700 Kelvin
- Housing Material: Die-cast aluminum
- Lens Material: PC
- Size (inch): 5.6*5*4.5



15113



Features

- 9PCS*10W Cree led effectively light up
- Flood beam for wide spread
- Equipped with breather vent plug
- Quake-proof when passing through rugged terrain
- 304 stainless steel U shape bracket and screws

Specification

- Watt: 90W
- Voltage: 10-30V DC
- Light Output(measured): 8775lumens
- Beam Pattern: Flood(1lux@96m)
- Color Temperature: 5700 Kelvin
- Housing Material: Die-cast aluminum
- Lens Material: PC
- Size (inch): 5.3*5.3*3.6



M1603




Features

- 6pcs*10W high intensity LED chips
- Flood beam provides perfect light pattern
- 5mm thickness stainless steel brackets
- Corrosion resistant and shock resistant
- Withstand the harshest conditions

Specification

- Watt: 60W
- Voltage: 10-30V DC
- Light Output(measured): 3600lumens
- Beam Pattern: Flood(1lux@93m)
- Color Temperature: 6000 Kelvin
- Housing Material: Die-cast aluminum
- Lens Material: PC
- Size (inch): 5.07*3.86*4.18

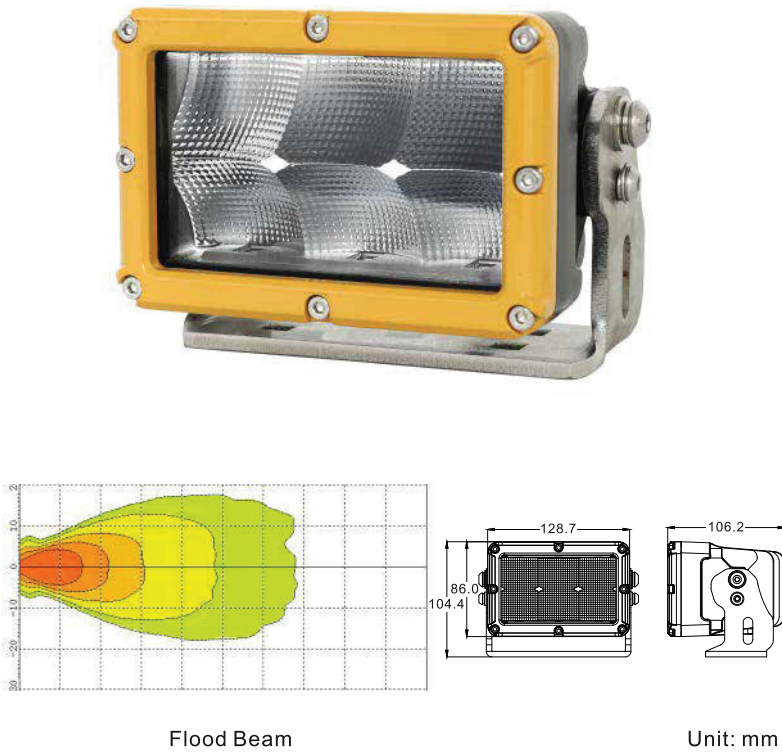

16107M




Features

- 36PCS*1W Osram S5 LED chip for optimal light spread
- Wider flood beam offers better vision field
- 6063 Aluminum profile improve the heat dissipation ability
- Equipped with marine grade copper galvanized wire
- 316#stainless steel adjustable mounting bracket

Specification

- Watt: 36W
- Voltage: 10-30V DC
- Light Output(measured): 6120lumens
- Beam Pattern: Flood(1lux@56m)
- Color Temperature: 6000 Kelvin
- Housing Material: Die-cast aluminum
- Lens Material: PC
- Size (inch): 5.98*1.97*2.35

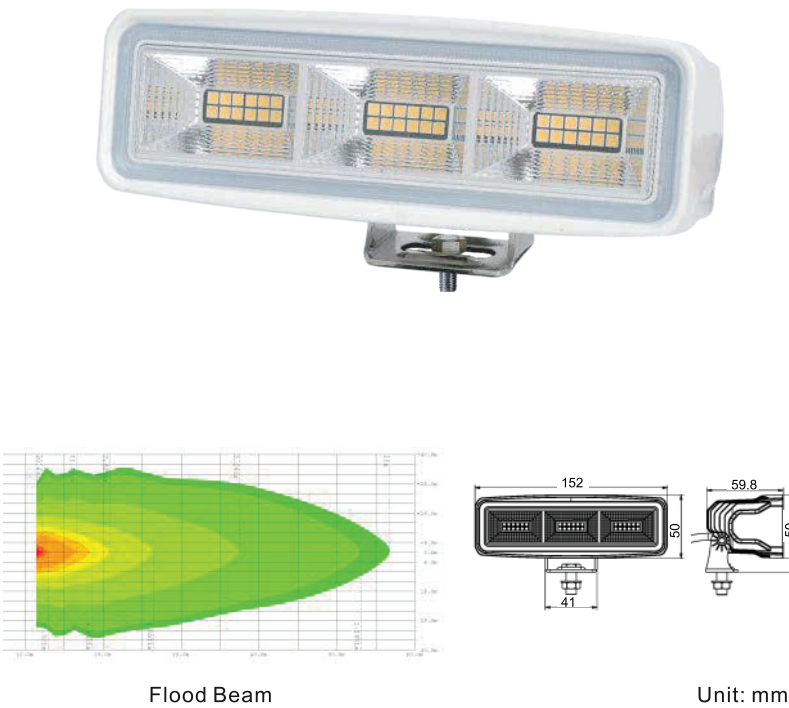

14129




Features

- 9pcs*6W high power Osram S8 LED Chips
- Powerful and delicate flood beam pattern
- UV resistant imported PC lens
- Semi-gloss black power coated die-cast aluminum
- Durable stainless steel mounting bracket system

Specification

- Watt: 54W
- Voltage: 10-30V DC
- Light Output(measured): 4468lumens
- Beam Pattern: Flood(1lux@68m)
- Color Temperature: 6000 Kelvin
- Housing Material: Die-cast aluminum
- Lens Material: PC
- Size (inch): 4*3.6*2.6

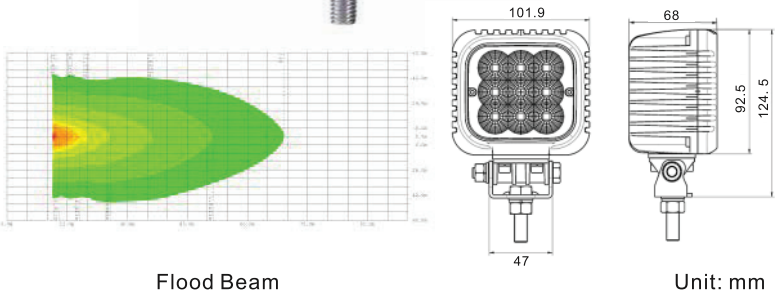

Flood Beam



BS15 Series

Features

- Dual color light pattern switching (White+Yellow)
- Bezel-less design for stream lined style
- Slim version, 36.2mm(1.4inch)height
- Stainless steel side brackets and bottom brackets

Specification

- Watt: 10w/pcs high intensity led
- Voltage: 10-30V DC
- Beam Pattern: Driving Light
- Color Temperature: 6000 Kelvin/3000 Kelvin
- Housing Material: Extruded aluminium
- Lens Material: PC
- Approval: CE, RoHS, IP67




Side Mount



Bottom Mount

FUNCTION

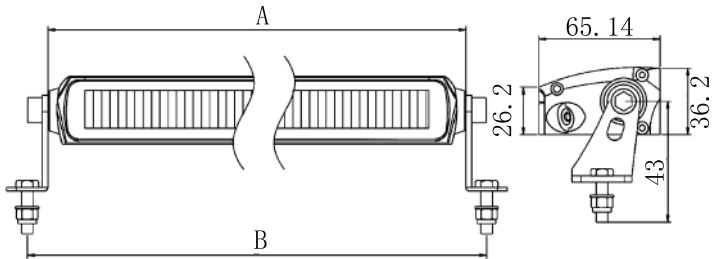

Unit: mm

Model	LED Chips	Watt	Length	A(mm)	B(mm)
BS15-4L	10W/pcs	40W	9inch	223	245
BS15-6L	10W/pcs	60W	12inch	315	337
BS15-10L	10W/pcs	100W	21.5inch	499	521
BS15-16L	10W/pcs	160W	31.5inch	775	797
BS15-20L	10W/pcs	200W	41.5inch	959	981
BS15-26L	10W/pcs	260W	50inch	1235	1257




BD10 Series

Features

- Choose from white or amber DRL
- Bezel-less design for stream lined style
- Anti-scratch hardened PC lens
- Aluminum delivers fast heat dissipation
- Adjustable sliding mounts/304 stainless steel side brackets

Specification

- LED Chips: 5W/pcs **Osram P8**
- Voltage: 10-30V DC
- Beam Pattern: Driving Light+DRL
- Color Temperature: 5700 Kelvin
- Housing Material: Extruded aluminium
- Lens Material: PC
- Approval: RoHS, CE, IP67





Side Mount



Bottom Mount

FUNCTION

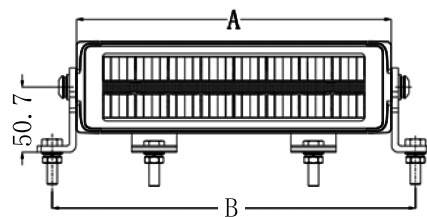

Unit: mm

Model	LED Chips	Watt	Length	A(mm)	B(mm)
BD10-16L	5W/pcs Osram P8	80W	10inch	255.5	282.8
BS10-24L	5W/pcs Osram P8	120W	14.1inch	359.3	386.3
BD10-40L	5W/pcs Osram P8	200W	22.3inch	566.3	593.3
BD10-56L	5W/pcs Osram P8	280W	30.5inch	773.3	800.3
BD10-80L	5W/pcs Osram P8	400W	42.6inch	1083.8	1110.8
BD10-96L	5W/pcs Osram P8	480W	50.8inch	1290.8	1320.8



BS12 Series

Features

- Choose from white or amber DRL
- Edgeless design avoids sticking of dust and rain
- Slim design applicable for multiple locations
- Aluminum delivers fast heat dissipation
- Adjustable sliding mounts/304 stainless steel side brackets

Specification

- LED Chips: 5W/pcs **Osram P8**
- Voltage: 10-30V DC
- Beam Pattern: Driving Light+DRL
- Color Temperature: 5700 Kelvin
- Housing Material: Extruded aluminium
- Lens Material: PC
- Approval:RoHS, CE, IP67





Side Mount



Bottom Mount

FUNCTION

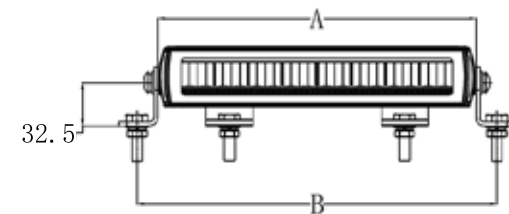

Unit: mm

Model	LED Chips	Watt	Length	A(mm)	B(mm)
BS12-8L	5W/pcs Osram P8	40W	9.4inch	239.6	271.1
BS12-12L	5W/pcs Osram P8	60W	13.5inch	342.9	374.4
BS12-20L	5W/pcs Osram P8	100W	21.6inch	549.6	581
BS12-28L	5W/pcs Osram P8	140W	29.7inch	756.2	787.6
BS12-40L	5W/pcs Osram P8	200W	41.9inch	1066	1097.5
BS12-48L	5W/pcs Osram P8	240W	50inch	1272.6	1304




BS01A Series

Features

- High intensity 12W/pcs led chips
- Bezel-less design for stream lined style
- Aluminum delivers fast heat dissipation
- M5 breather vent plug balances pressure
- Adjustable sliding mounts/304 stainless steel side brackets

Specification

- Watt: 12w/pcs high intensity led
- Voltage: 10-30V DC
- Beam Pattern: Driving light
- Color Temperature: 6000K
- Housing Material: Extruded aluminium
- Lens Material: PC
- Approval: ECE R149, ECE R10, CE, IP67

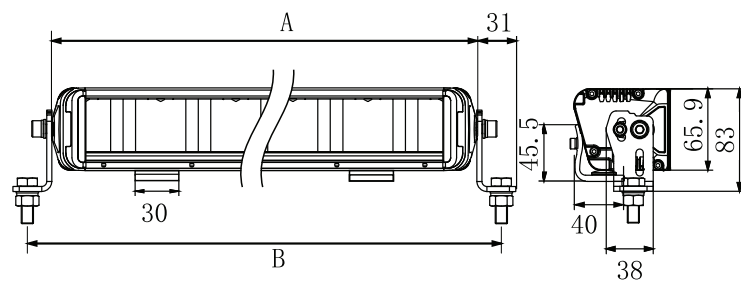

Unit: mm



Side Mount



Bottom Mount

Model	LED Chips	Watt	Length	A(mm)	B(mm)
BS01A-4L	12W/pcs	48W	11.6inch	296	335
BS01A-8L	12W/pcs	96W	21.14inch	537	576
BS01A-12L	12W/pcs	144W	30.61inch	777.5	816.5
BS01A-16L	12W/pcs	192W	40.08inch	1018	1057
BS01A-20L	12W/pcs	240W	49.53inch	1258	1297




BS02 Series

Features

- 5W/Pcs Osram LED with high power and high lumen
- Slim version, 40.7mm(1.6inch) height
- Bezel-less lens design system for good driving light beam
- M5 high grade breather vent plug equipped
- Adjustable sliding mounts/ 304 Stainless steel side brackets

Specification

- Watt: 5w/Pcs **Osram P8**
- Voltage: 10-30V DC
- Beam Pattern: Driving light
- Color Temperature: 5700K
- Housing Material: Extruded aluminium
- Lens Material: PC
- Approval: ECE R149, ECE R10, CE, IP67

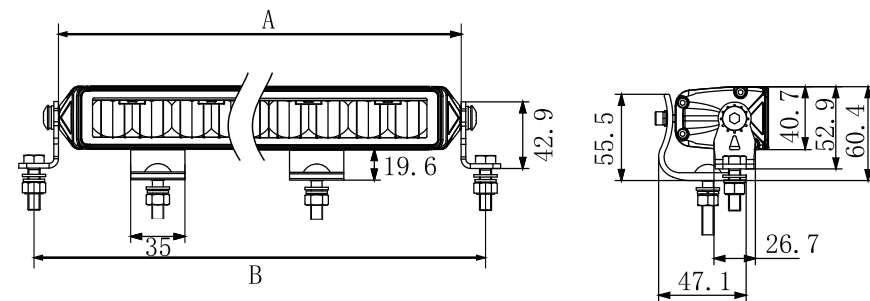

Unit: mm



Side Mount



Bottom Mount

Model	LED Chips	Watt	Length	A(mm)	B(mm)
BS02-8L	5W/pcs Osram P8	40W	11inch	248	279.5
BS02-12L	5W/pcs Osram P8	60W	15.02inch	350	381.5
BS02-16L	5W/pcs Osram P8	80W	19.05inch	452.3	483.8
BS02-24L	5W/pcs Osram P8	120W	27.11inch	657	688.5
BS02-32L	5W/pcs Osram P8	160W	35.18inch	862	893.5
BS02-40L	5W/pcs Osram P8	200W	43.25inch	1067	1098.5
BS02-48L	5W/pcs Osram P8	240W	50.19inch	1271.6	1274.5




BS09 Series

Features

- 5W/Pcs Osram LED with high power and high lumen
- Curved slim version, 40.7mm(1.6inch) height
- Bezel-less lens design system for perfect driving light beam
- M5 high grade breather vent plug equipped

Specification

- LED Chips: 5W/pcs **Osram P8**
- Voltage: 10-30V DC
- Beam Pattern: Driving light
- Color Temperature: 5700K
- Housing Material: Extruded aluminium
- Lens Material: PC
- Approval: ECE R149, ECE R10, CE, IP67

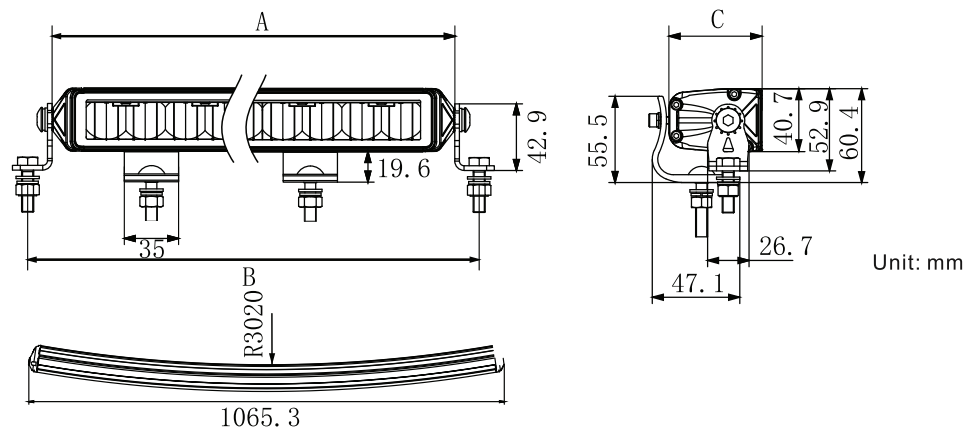

Side Mount

Bottom Mount

Model	LED Chips	Watt	Length	A(mm)	B(mm)	C(mm)
BS09-20L	5W/pcs Osram P8	100W	21.85inch	555	580.5	70.9
BS09-28L	5W/pcs Osram P8	140W	29.9inch	759.4	784.9	81.3
BS09-40L	5W/pcs Osram P8	200W	41.9inch	1064.2	1089.7	103.2
BS09-48L	5W/pcs Osram P8	240W	49.74inch	1269.8	1288.8	122.3

LED WORK LIGHT

We are premier manufacturer of high quality led work light including 4x4 off-road led work light, E-mark R10&R23 reverse led work lamp, square round oval led work light, flush mount led work light, led cube pod light, led flood tractor light, led truck light, 7 inch led driving light etc... All led work lights adopts premium materials: great heat conductive PCB, high luminous Osram/Cree leds, Exquisite aluminum housing, unfading electroplated layer reflector, double-faced corrosion harden PC lens materials, smooth appearance outdoor powder, flexible and strong mounting systems, all these makes our work lights be compact, portable, high brightness and excellent performance. Comply with CE, RoHS, IP67, IP68, IP69K, LVC, E-mark certification(R10, R23, R149, R65) etc... As a manufacturer, we can provide customers great led work lights with competitive price and stable quality.



**13119A(3.94")**

LEDs	2pcs*5W Osram P7	AMP Draw	0.58A@12V, 0.29A@24V
Max.Power	10W	Size	100*60.2*52.8mm
Lumen	810lm	Bracket Material	304 Stainless steel
Beam	Flood	Package Standard	20pcs/carton

**15114A(6.30")**

LEDs	4pcs*5W Osram P7	AMP Draw	1.17A@12V, 0.58A@24V
Max.Power	20W	Size	160.1*59.7*54.2mm
Lumen	1740lm	Bracket Material	304 Stainless steel
Beam	Flood	Package Standard	20pcs/carton

**13122(3.97")**

LEDs	5pcs*3W Osram P7	AMP Draw	0.83A@12V, 0.42A@24V
Max.Power	15W	Size	101.9*84.4*38.3mm
Lumen	668lm	Bracket Material	Stainless steel
Beam	Flood	Package Standard	20pcs/carton

**13111(3.81")**

LEDs	2pcs*10W Osram P9	AMP Draw	1.24A@12V, 0.62A@24V
Max.Power	20W	Size	96.9*58.3*69.7mm
Lumen	1840lm	Bracket Material	304 Stainless steel
Beam	Flood	Package Standard	12pcs/carton

**14121(3.93")**

LEDs	4pcs*10W Osram P9	AMP Draw	2.33A@12V, 1.17A@24V
Max.Power	40W	Size	100.4*98.2*93.7mm
Lumen	3800lm	Bracket Material	304 Stainless steel
Beam	Flood, Spot, Diffuse	Package Standard	12pcs/carton

**13117(3.14")**

LEDs	4pcs*10W Cree LED	AMP Draw	3.34A@12V, 1.67A@24V
Max.Power	40W	Size	79.8*80*77.9mm
Lumen	3600lm	Bracket Material	304 Stainless steel
Beam	Spot, Combo	Package Standard	20pcs/carton

**16116(5.90")**

LEDs	6pcs*5W Cree LED	AMP Draw	2.18A@12V, 1.09A@24V
Max.Power	30W	Size	150*89.5*72mm
Lumen	2400lm	Bracket Material	304 Stainless steel
Beam	Spot, Flood	Package Standard	12pcs/carton

**16215(5.55")**

LEDs	6pcs*5W Cree LED	AMP Draw	2.14A@12V, 1.07A@24V
Max.Power	30W	Size	141*90*59mm
Lumen	2400lm	Bracket Material	304 Stainless steel
Beam	Flood, Diffuse	Package Standard	12pcs/carton

**16203(6.79")**

LEDs	12pcs*3W Cree LED	AMP Draw	2.40A@12V, 1.20A@24V
Max.Power	36W	Size	178.5*123.5*74mm
Lumen	3120lm	Bracket Material	Stainless steel
Beam	Spot, Flood	Package Standard	12pcs/carton

**14128(3.96")**

LEDs	9pcs*4W Osram S8	AMP Draw	2.76A@12V, 1.38A@24V
Max.Power	36W	Size	100.6*100.8*45.7mm
Lumen	6075lm	Bracket Material	304 Stainless steel
Beam	Flood	Package Standard	12pcs/carton

**14228(4.43")**

LEDs	9pcs*4W Osram S8	AMP Draw	2.84A@12V, 1.42A@24V
Max.Power	36W	Size	112.6*112.6*45.7mm
Lumen	6075lm	Bracket Material	304 Stainless steel
Beam	Flood	Package Standard	12pcs/carton

**15108(4.22")**

LEDs	9pcs*4W Cree LED	AMP Draw	2.58A@12V, 1.29A@24V
Max.Power	36W	Size	108.1*105.9*65.7mm
Lumen	3510lm	Bracket Material	304 Stainless steel
Beam	Driving light beam	Package Standard	12pcs/carton



12101(2.50")



LEDs	4pcs*3W Epistar	AMP Draw	0.74A@12V, 0.37A@24V
Max.Power	12W	Size	66*66*65mm
Lumen	960lm	Bracket Material	Stainless steel
Beam	Spot, Flood	Package Standard	20pcs/carton



12102(2.50")



LEDs	1pcs*10W Cree LED	AMP Draw	0.80A@12V, 0.40A@24V
Max.Power	10W	Size	66*66*65mm
Lumen	970lm	Bracket Material	Stainless steel
Beam	Spot, Flood	Package Standard	20pcs/carton



12103(1.97")



LEDs	1pcs*10W Cree LED	AMP Draw	0.64A@12V, 0.32A@24V
Max.Power	10W	Size	50*50*60mm
Lumen	970lm	Bracket Material	Stainless steel
Beam	Spot, Flood	Package Standard	20pcs/carton



12202(2.10")



LEDs	1pcs*10W Cree LED	AMP Draw	0.68A@12V, 0.34A@24V
Max.Power	10W	Size	54*54*65mm
Lumen	970lm	Bracket Material	Stainless steel
Beam	Spot, Flood	Package Standard	20pcs/carton



13201(3.26")



LEDs	4pcs*3W Epistar	AMP Draw	0.82A@12V, 0.41A@24V
Max.Power	12W	Size	83*83*76mm
Lumen	960lm	Bracket Material	Stainless steel
Beam	Flood	Package Standard	20pcs/carton



13205-2(2.52")



LEDs	1pcs*20W	AMP Draw	1.12A@12V, 0.56A@24V
Max.Power	20W	Size	64.1*63.8*70.1mm
Lumen	1500lm	Bracket Material	304 Stainless steel
Beam	Flood	Package Standard	20pcs/carton



13205-3(2.52")



LEDs	3pcs*4W	AMP Draw	0.64A@12V, 0.32A@24V
Max.Power	12W	Size	64.1*63.8*70.1mm
Lumen	Blue 970lm/Red 200lm	Bracket Material	304 Stainless steel
Beam	Pencil beam	Package Standard	20pcs/carton



13101(3.25")



LEDs	4pcs*4W Cree LED	AMP Draw	0.82A@12V, 0.41A@24V
Max.Power	16W	Size	82.6*75.1*79.5mm
Lumen	1040lm	Bracket Material	Stainless steel
Beam	Spot, Flood	Package Standard	20pcs/carton



13101A(4.80")



LEDs	4pcs*4W Cree LED	AMP Draw	0.82A@12V, 0.41A@24V
Max.Power	16W	Size	122*92*80mm
Lumen	1040lm	Bracket Material	Stainless steel
Beam	Spot, Flood	Package Standard	20pcs/carton



13102(3.25")



LEDs	6pcs*4W Cree LED	AMP Draw	0.98A@12V, 0.49A@24V
Max.Power	24W	Size	82.6*75.1*79.5mm
Lumen	1560lm	Bracket Material	Stainless steel
Beam	Spot, Flood	Package Standard	20pcs/carton



13102A(4.80")



LEDs	6pcs*4W Cree LED	AMP Draw	0.98A@12V, 0.49A@24V
Max.Power	24W	Size	122*92*80mm
Lumen	1560lm	Bracket Material	Stainless steel
Beam	Spot, Flood	Package Standard	20pcs/carton



14218(4.00")



LEDs	2pcs*10W Cree LED	AMP Draw	0.99A@12V, 0.50A@24V
Max.Power	20W	Size	97.8*67.6*63mm
Lumen	1940lm	Bracket Material	Stainless steel
Beam	Spot	Package Standard	20pcs/carton

**14220(3.50")**

LEDs	6pcs*3W Osram	AMP Draw	1.50A@12V, 0.75A@24V
Max.Power	18W	Size	89*89*64mm
Lumen	1710lm	Bracket Material	Stainless steel
Beam	Spot	Package Standard	20pcs/carton

**14201(4.54")**

LEDs	6pcs*3W Epistar	AMP Draw	1.50A@12V, 0.75A@24V
Max.Power	18W	Size	115*115*35mm
Lumen	1350lm	Bracket Material	Stainless steel
Beam	Spot, Flood	Package Standard	20pcs/carton

**14203(4.52")**

LEDs	8pcs*3W Epistar	AMP Draw	2.00A@12V, 1.00A@24V
Max.Power	24W	Size	115*115*41mm
Lumen	1920lm	Bracket Material	Stainless steel
Beam	Spot, Flood	Package Standard	20pcs/carton

**14202(4.52")**

LEDs	9pcs*3W Epistar	AMP Draw	2.25A@12V, 1.13A@24V
Max.Power	27W	Size	115.5*115.5*63.5mm
Lumen	2160lm	Bracket Material	Stainless steel
Beam	Flood	Package Standard	20pcs/carton

**14204(4.52")**

LEDs	14pcs*3W Epistar	AMP Draw	3.50A@12V, 1.75A@24V
Max.Power	42W	Size	115*115*70mm
Lumen	3360lm	Bracket Material	Stainless steel
Beam	Spot, Flood	Package Standard	20pcs/carton

**14101(4.33")**

LEDs	5pcs*3W Epistar	AMP Draw	0.96A@12V, 0.48A@24V
Max.Power	15W	Size	110*110*45mm
Lumen	1200lm	Bracket Material	Stainless steel
Beam	Spot, Flood	Package Standard	20pcs/carton

**14102(4.24")**

LEDs	9pcs*3W Epistar	AMP Draw	1.84A@12V, 0.92A@24V
Max.Power	27W	Size	107.6*107.6*58mm
Lumen	2160lm	Bracket Material	Stainless steel
Beam	Spot, Flood	Package Standard	20pcs/carton

**14103(4.13")**

LEDs	8pcs*3W Epistar	AMP Draw	1.84A@12V, 0.92A@24V
Max.Power	24W	Size	105*105*45mm
Lumen	1920lm	Bracket Material	Stainless steel
Beam	Spot, Flood	Package Standard	20pcs/carton

**14104(4.33")**

LEDs	16pcs*3W Epistar	AMP Draw	4.00A@12V, 2.00A@24V
Max.Power	48W	Size	110*110*72mm
Lumen	3840lm	Bracket Material	Stainless steel
Beam	Spot, Flood	Package Standard	20pcs/carton

**14113(4.50")**

LEDs	3pcs*3W Epistar	AMP Draw	0.75A@12V, 0.38A@24V
Max.Power	9W	Size	110*60*56mm
Lumen	720lm	Bracket Material	Stainless steel
Beam	Spot, Flood	Package Standard	20pcs/carton

**14111(4.50")**

LEDs	6pcs*3W Epistar	AMP Draw	1.50A@12V, 0.75A@24V
Max.Power	18W	Size	110*60*56mm
Lumen	1440lm	Bracket Material	Stainless steel
Beam	Spot, Flood	Package Standard	20pcs/carton

**14112(4.50")**

LEDs	2pcs*10W Cree LED	AMP Draw	0.82A@12V, 0.41A@24V
Max.Power	20W	Size	110*60*56mm
Lumen	1940lm	Bracket Material	Stainless steel
Beam	Spot, Flood	Package Standard	20pcs/carton


15104(4.92")


LEDs	4pcs*10W Cree LED	AMP Draw	2.44A@12V, 1.22A@24V
Max.Power	40W	Size	125*115*90mm
Lumen	3880lm	Bracket Material	Stainless steel
Beam	Spot, Flood	Package Standard	12pcs/carton


15105(4.92")


LEDs	16pcs*3W Cree LED	AMP Draw	4.00A@12V, 2.00A@24V
Max.Power	48W	Size	125*115*90mm
Lumen	4160lm	Bracket Material	Stainless steel
Beam	Spot, Flood	Package Standard	12pcs/carton


16109(6.26")


LEDs	11pcs*3W	AMP Draw	1.83A@12V, 0.92A@24V
Max.Power	33W	Size	159.1*94.3*75.4mm
Lumen	3300lm	Bracket Material	304 Stainless steel
Beam	Flood	Package Standard	12pcs/carton


16111(6.26")


LEDs	15pcs*3W	AMP Draw	2.51A@12V, 1.25A@24V
Max.Power	45W	Size	159.1*94.3*75.4mm
Lumen	4500lm	Bracket Material	304 Stainless steel
Beam	Flood	Package Standard	12pcs/carton


16107(6.29")


LEDs	6pcs*3W Epistar	AMP Draw	1.02A@12V, 0.51A@24V
Max.Power	18W	Size	159*8*45.2*47.5mm
Lumen	1260lm	Bracket Material	Stainless steel
Beam	Spot, Flood	Package Standard	20pcs/carton


16103(5.31")


LEDs	6pcs*10W Cree LED	AMP Draw	3.61A@12V, 1.81A@24V
Max.Power	60W	Size	135*120*124mm
Lumen	5100lm	Bracket Material	304 Stainless steel
Beam	Spot, Flood	Package Standard	6pcs/carton


16104(5.31")


LEDs	9pcs*10W Cree LED	AMP Draw	5.76A@12V, 2.88A@24V
Max.Power	90W	Size	135*120*124mm
Lumen	7650lm	Bracket Material	304 Stainless steel
Beam	Spot, Flood	Package Standard	6pcs/carton


17102(5.66")


LEDs	20pcs*3.75W Osram	AMP Draw	6.44A@12V, 3.22A@24V
Max.Power	75W	Size	139*143.8*79.6mm
Lumen	9000lm	Bracket Material	304 Stainless steel
Beam	Combo	Package Standard	6pcs/carton


17103(5.66")


LEDs	24pcs*3.33W Osram	AMP Draw	6.67A@12V, 3.33A@24V
Max.Power	80W	Size	139*143.8*79.6mm
Lumen	10800lm	Bracket Material	304 Stainless steel
Beam	Pencil beam	Package Standard	6pcs/carton


17104(5.66")


LEDs	16pcs*4.375W Osram	AMP Draw	4.86A@12V, 2.43A@24V
Max.Power	70W	Size	139*143.8*79.6mm
Lumen	7200lm	Bracket Material	304 Stainless steel
Beam	Hyper spot beam	Package Standard	6pcs/carton


15109(4.47")


LEDs	8pcs*3W Osram P8	AMP Draw	1.50A@12V, 0.75A@24V
Max.Power	24W	Size	107.3*107.3*60.8mm
Lumen	2680lm	Bracket Material	304 Stainless steel
Beam	Flood	Package Standard	20pcs/carton


15103(4.40")


LEDs	5pcs*10W Cree LED	AMP Draw	3.10A@12V, 1.55A@24V
Max.Power	50W	Size	112*112*88mm
Lumen	4850lm	Bracket Material	Iron Bracket
Beam	Spot, Flood Combo	Package Standard	12pcs/carton



16102(5.51")



LEDs	8pcs*10W Cree LED	AMP Draw	4.40A@12V, 2.20A@24V
Max.Power	80W	Size	140*140*92mm
Lumen	7760lm	Bracket Material	Stainless steel
Beam	Spot, Flood, Combo	Package Standard	6pcs/carton



16205(5.50")



LEDs	9pcs*5W Cree LED	AMP Draw	3.10A@12V, 1.55A@24V
Max.Power	45W	Size	140*140*90mm
Lumen	3780lm	Bracket Material	Stainless steel
Beam	Hyperspot	Package Standard	6pcs/carton
Ring Color	Chrome, Black		



17204(7.00")



LEDs	12pcs*5W Cree LED	AMP Draw	3.90A@12V, 1.95A@24V
Max.Power	60W	Size	180*180*97mm
Lumen	5040lm	Bracket Material	Stainless steel
Beam	Hyperspot	Package Standard	4pcs/carton
Ring Color	Chrome, Black		



18101(7.64")



LEDs	15pcs*6W Osram P9	AMP Draw	6.67A@12V, 3.34A@24V
Max.Power	90W	Size	194.2*130*78.8mm
Lumen	9675lm	Bracket Material	304 Stainless steel
Beam	Flood	Package Standard	6pcs/carton



17202(6.29")



LEDs	17pcs*3W Epistar	AMP Draw	3.22A@12V, 1.61A@24V
Max.Power	51W	Size	160*160*86mm
Lumen	3825lm	Lens Material	PMMA Reflector
Beam	Spot, Flood	Bracket Material	Stainless steel
Ring Color	Black, Yellow, Red	Package Standard	6pcs/carton



17203(6.29")



LEDs	17pcs*3W Epistar	AMP Draw	3.57A@12V, 1.77A@24V
Max.Power	51W	Size	160*160*86mm
Lumen	3825lm	Lens Material	PMMA Reflector
Beam	Spot, Flood	Bracket Material	Stainless steel
Ring Color	Black, Yellow, Red	Package Standard	6pcs/carton



14223(4.50")



LEDs	12pcs*3W Osram P7	AMP Draw	2.52A@12V, 1.26A@24V
Max.Power	36W	Size	115*115*59.7mm
Lumen	3780lm	Bracket Material	304 Stainless steel
Beam	Driving light beam	Package Standard	20pcs/carton



15207(5.30")



LEDs	14pcs*3W Osram P7	AMP Draw	2.74A@12V, 1.37A@24V
Max.Power	42W	Size	136*9*136.9*54.4mm
Lumen	4410lm	Bracket Material	304 Stainless steel
Beam	Driving light beam	Package Standard	12pcs/carton



17213(6.80")



LEDs	22pcs*3W Osram P7	AMP Draw	5.00A@12V, 2.50A@24V
Max.Power	66W	Size	173*173*68mm
Lumen	6930lm	Bracket Material	304 Stainless steel
Beam	Driving light beam	Package Standard	6pcs/carton



19203(8.85")



LEDs	37pcs*3W Osram P7	AMP Draw	7.50A@12V, 3.75A@24V
Max.Power	111W	Size	225*225*71.9mm
Lumen	11655lm	Bracket Material	304 Stainless steel
Beam	Driving light beam	Package Standard	6pcs/carton



17201(6.69")



LEDs	3pcs*15W Cree LED	AMP Draw	2.80A@12V, 1.40A@24V
Max.Power	45W	Size	170*170*133mm
Lumen	4360lm	Bracket Material	Stainless steel
Beam	Spot	Package Standard	6pcs/carton



1X103(9.66")




LEDs	8pcs*10W Cree LED	AMP Draw	5.06A@12V, 2.53A@24V
Max.Power	80W	Size	245.4*140.4*93mm
Lumen	7760lm	Bracket Material	304 Stainless steel
Beam	Spot+DRL	Package Standard	6pcs/carton

LED LIGHT BAR

We are leading manufacturer of premium led light bars including 4x4 off-road led light bar, E-mark R10&R149 led light bar, single row slim led light bar, dual row led light bar, curved led light bar, side emitting led light bar ect...The performance quality of our led light bars surpass most of our competitors in this industry, we adopt premium material: EMC and RFI PCB, genuine Osram/Cree leds, fast heat dissipation aluminum housing, high optical efficiency reflectors, scratch-resistant PC lens materials, imported outdoor unfading powder, tough and strong mounting systems, all these makes our light bars to have extreme durability, superior visibility and great light performance. Our light bars are complied with CE, RoHS, IP67, IP68, IP69K, LVC, E-mark certification(R10, R149, R65), DOT, SAE ect...

The colorful decorative kit design is the new creative pioneering design by us, adding beautiful highlights to the normal black led light bars, cater to novelty and individualism desire of the road enthusiast. The newly launch of our side emitting light bar recently also symbolizes a great technical break though made by us.

BD11 Series

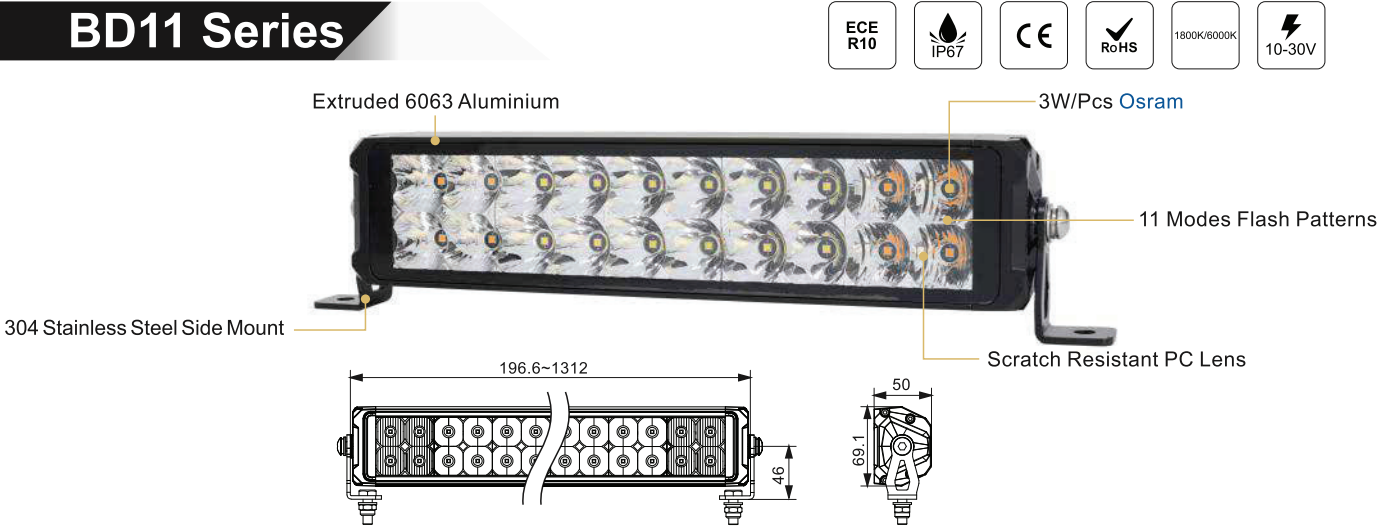

BD11-12L(7.74"/36W)

3780lm · 196.6*50.0*80.6mm · 6Pcs/CTN

BD11-20L(11.73"/60W)

6300lm · 298.0*50.0*80.6mm · 6Pcs/CTN

BD11-24L(13.73"/72W)

7560lm · 348.7*50.0*80.6mm · 6Pcs/CTN

BD11-40L(21.71"/120W)

12600lm · 551.5*50.0*80.6mm · 4Pcs/CTN

BD11-60L(31.69"/180W)

18900lm · 805.0*50.0*80.6mm · 4Pcs/CTN


BD11-80L(41.67"/240W)

25200lm · 1058.5*50.0*80.6mm · 4Pcs/CTN

BD11-100L(51.65"/300W)

31500lm · 1312.0*50.0*80.6mm · 4Pcs/CTN

BS08 Series

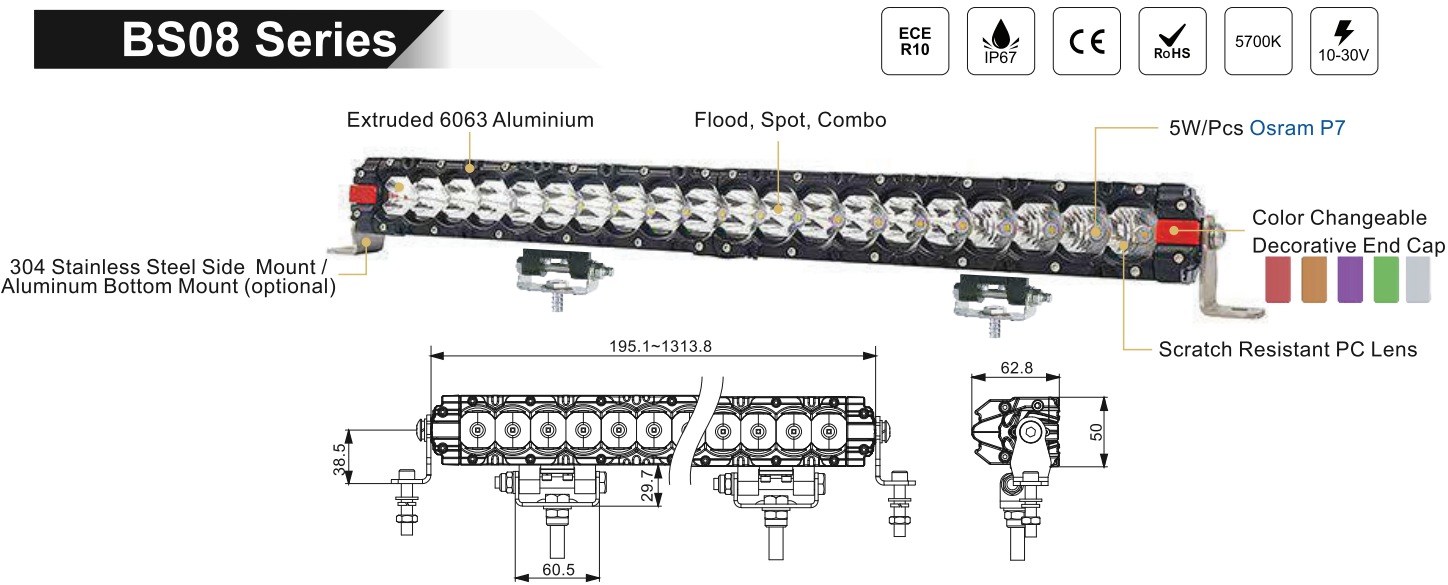

BS08-6L(7.68"/30W)

2610lm · 195.1*62.8*50.0mm · 10Pcs/CTN

BS08-10L(11.70"/50W)

4350lm · 296.7*62.8*50.0mm · 10Pcs/CTN

BS08-20L(21.60"/100W)

8700lm · 550.7*62.8*50.0mm · 6Pcs/CTN

BS08-30L(31.70"/150W)

13050lm · 805.5*62.8*50.0mm · 6Pcs/CTN

BS08-40L(41.70"/200W)


17400lm · 1059.3*62.8*50.0mm · 6Pcs/CTN

BS08-50L(51.90"/250W)

21750lm · 1313.8*62.8*50.0mm · 4Pcs/CTN



BD01B Series

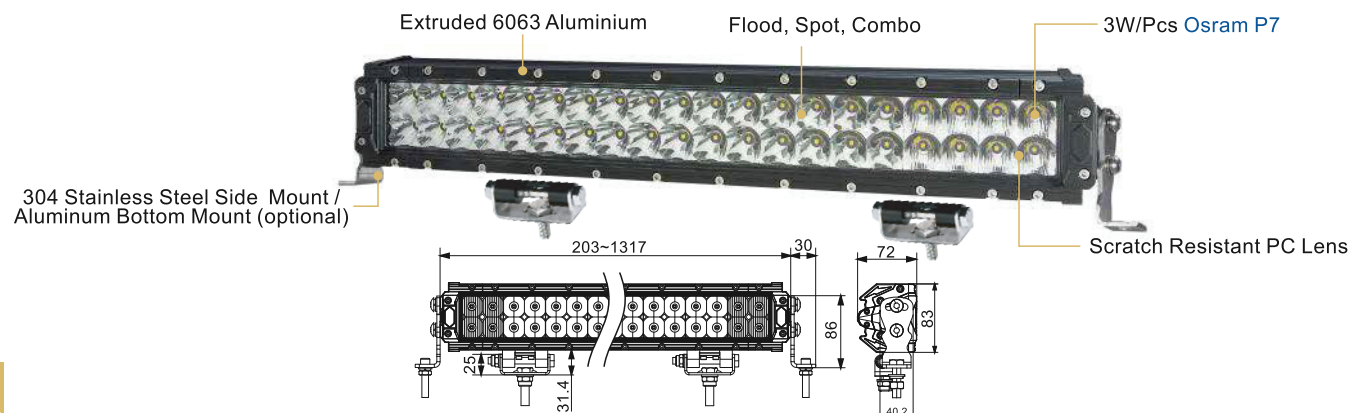

BD01B-12L(7.99"/36W)

4080lm · 202.9*72.0*83.0mm · 6Pcs/CTN

BD01B-20L(11.96"/60W)

6800lm · 303.8*72.0*83.0mm · 6Pcs/CTN

BD01B-24L(13.97"/72W)

8160lm · 354.8*72.0*83.0mm · 6Pcs/CTN

BD01B-40L(21.96"/120W)

13600lm · 557.8*72.0*83.0mm · 4Pcs/CTN

BD01B-52L(27.91"/156W)

17680lm · 708.9*72.0*83.0mm · 4Pcs/CTN

BD01B-60L(31.90"/180W)

20400lm · 810.3*72.0*83.0mm · 4Pcs/CTN

BD01B-80L(41.80"/240W)

27200lm · 1061.7*72.0*83.0mm · 4Pcs/CTN


BD01B-96L(49.80"/288W)

32640lm · 1264.9*72.0*83.0mm · 4Pcs/CTN

BD01B-100L(51.85"/300W)

34000lm · 1316.9*72.0*83.0mm · 4Pcs/CTN

BD06B Series

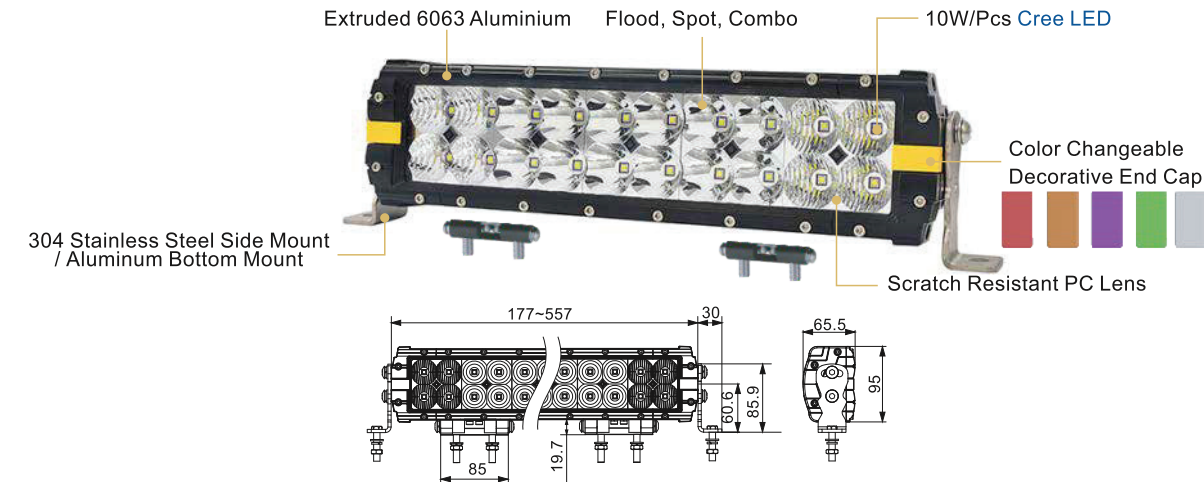

BD06B-8L(7.00"/80W)

7760lm · 177.8*65.4*94.6mm · 6Pcs/CTN

BD06B-12L(9.46"/120W)

11640lm · 240.2*65.4*94.6mm · 4Pcs/CTN

BD06B-16L(12.00"/160W)

15520lm · 304.8*65.4*94.6mm · 4Pcs/CTN

BD06B-20L(14.50"/200W)

19400lm · 368.3*65.4*94.6mm · 4Pcs/CTN

BD06B-24L(17.00"/240W)

23280lm · 431.8*65.4*94.6mm · 4Pcs/CTN


BD06B-28L(19.5"/280W)

27160lm · 495.3*65.4*94.6mm · 2Pcs/CTN

BD06B-32L(22.00"/320W)

31040lm · 558.8*65.4*94.6mm · 2Pcs/CTN

BS06B Series

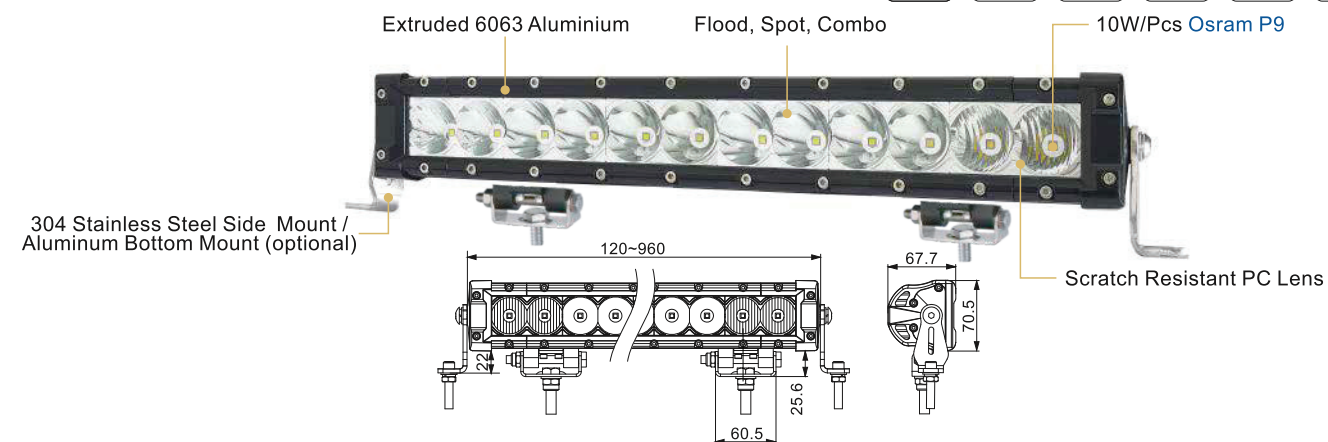

BS06B-2L(4.70"/20W)

1840lm · 119.4*67.7*70.5mm · 12Pcs/CTN

BS06B-6L(10.23"/60W)

5520lm · 259.8*67.7*70.5mm · 6Pcs/CTN

BS06B-8L(12.99"/80W)

7360lm · 329.9*67.7*70.5mm · 6Pcs/CTN

BS06B-12L(18.56"/120W)

11040lm · 471.4*67.7*70.5mm · 4Pcs/CTN

BS06B-16L(24.11"/160W)

14720lm · 612.3*67.7*70.5mm · 4Pcs/CTN

BS06B-20L(29.66"/200W)

18400lm · 753.3*67.7*70.5mm · 4Pcs/CTN


BS06B-24L(35.21"/240W)

22080lm · 894.3*67.7*70.5mm · 2Pcs/CTN

BS06B-26L(37.99"/260W)

23920lm · 964.9*67.7*70.5mm · 1Pcs/CTN

BS03 Series

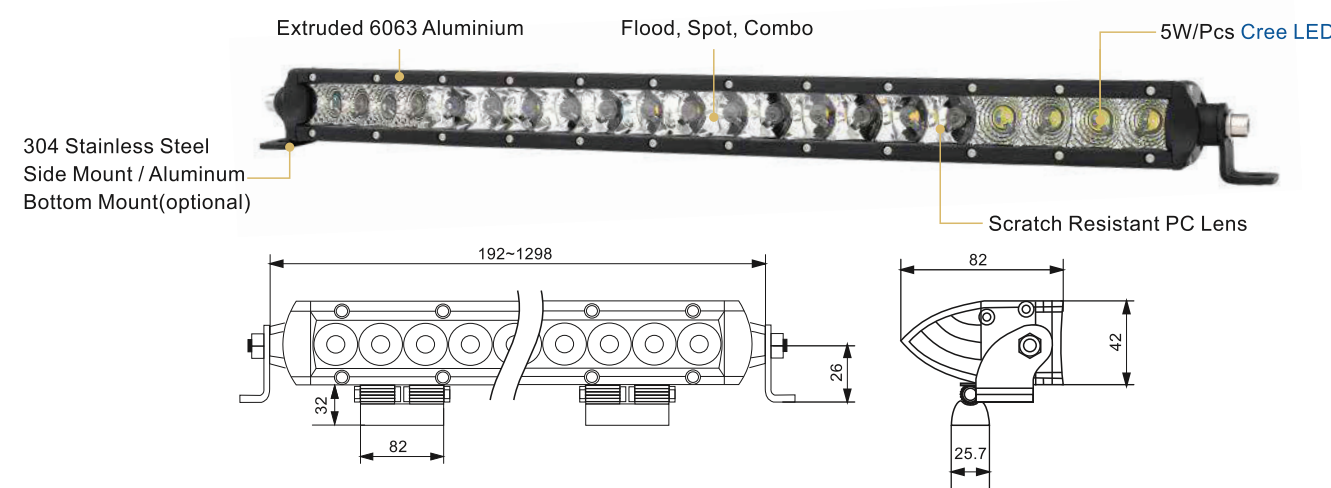

BS03-6L(7.60"/30W)

2200lm · 193.0*82.0*42.0mm · 20Pcs/CTN

BS03-10L(11.50"/50W)

3666lm · 292.1*82.0*42.0mm · 10Pcs/CTN

BS03-20L(21.30"/100W)

7333lm · 541.0*82.0*42.0mm · 6Pcs/CTN

BS03-30L(31.40"/150W)

10980lm · 797.5*82.0*42.0mm · 6Pcs/CTN


BS03-40L(41.30"/200W)

14640lm · 1049.0*82.0*42.0mm · 4Pcs/CTN

BS03-50L(51.10"/250W)

18300lm · 1297.9*82.0*42.0mm · 4Pcs/CTN

BS04 Series

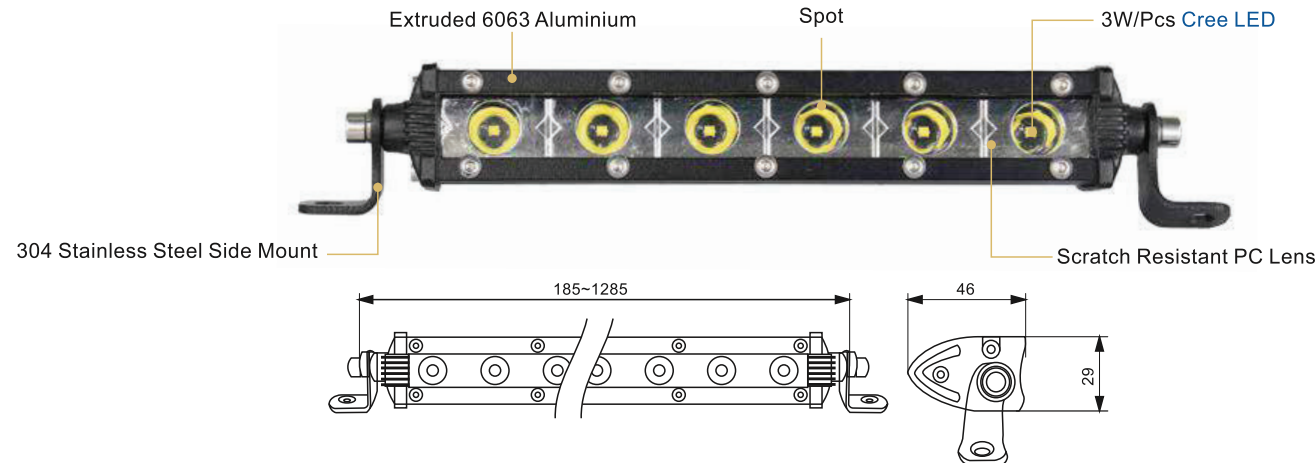

BS04-6L(7.30"/18W)

1560lm · 185.4*46.0*29.0mm · 30Pcs/CTN

BS04-12L(13.40"/36W)

3120lm · 340.3*46.0*29.0mm · 20Pcs/CTN

BS04-18L(19.70"/54W)

4680lm · 500.3*46.0*29.0mm · 12Pcs/CTN

BS04-24L(25.80"/72W)

6240lm · 655.3*46.0*29.0mm · 12Pcs/CTN

BS04-30L(32.00"/90W)

7800lm · 812.8*46.0*29.0mm · 12Pcs/CTN

BS04-36L(38.20"/108W)

9360lm · 970.2*46.0*29.0mm · 6Pcs/CTN


BS04-42L(44.30"/126W)

10920lm · 1125.2*46.0*29.0mm · 6Pcs/CTN

BS04-48L(50.60"/144W)

12480lm · 1285.2*46.0*29.0mm · 6Pcs/CTN

BS03D Series

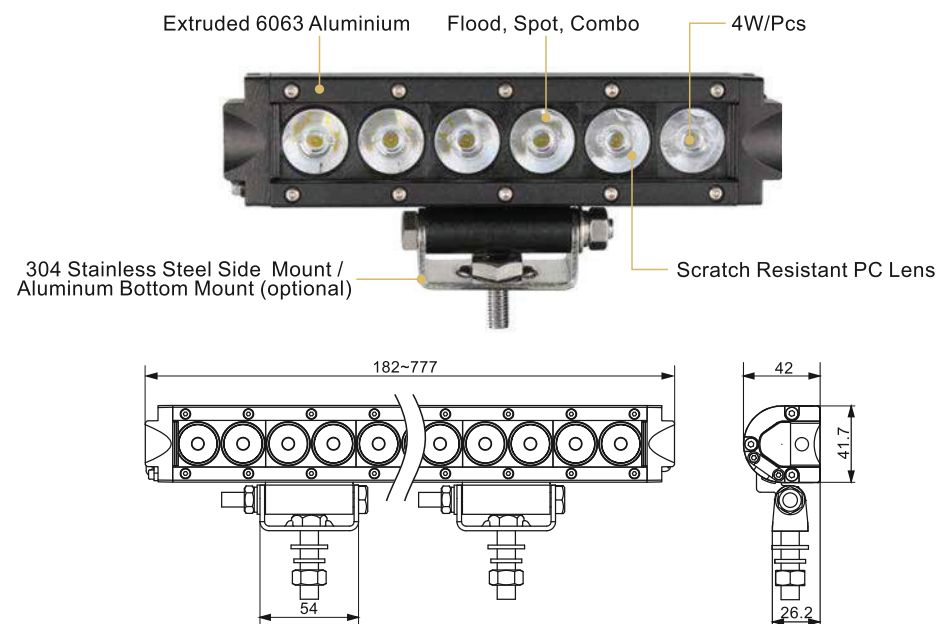

BS03D-6L(7.20"/24W)

1732lm · 182.8*42.0*41.7mm · 20Pcs/CTN

BS03DB-12L(13.00"/48W)

3465lm · 330.2*42.0*41.7mm · 10Pcs/CTN


BS03D-20L(20.80"/80W)

5775lm · 528.3*42.0*41.7mm · 10Pcs/CTN

BS03DB-30L(30.60"/120W)

8662lm · 777.2*42.0*41.7mm · 6Pcs/CTN

BS05 Series

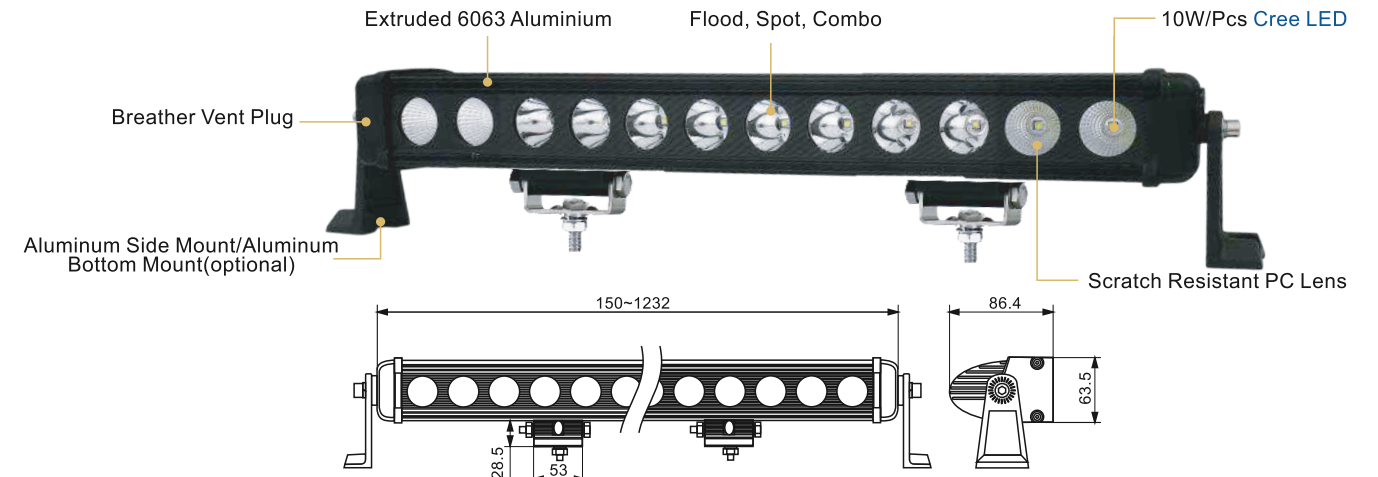

BS05-2L(6.10"/20W)

1940lm · 154.9*86.4*63.5mm · 12Pcs/CTN

BS05-4L(9.30"/40W)

3880lm · 236.2*86.4*63.5mm · 6Pcs/CTN

BS05-8L(16.20"/80W)

7760lm · 411.4*86.4*63.5mm · 6Pcs/CTN

BS05-12L(23.30"/120W)

11640lm · 591.8*86.4*63.5mm · 4Pcs/CTN

BS05-16L(31.00"/160W)

15520lm · 787.4*86.4*63.5mm · 4Pcs/CTN

BS05-20L(37.50"/200W)

19400lm · 953.5*86.4*63.5mm · 4Pcs/CTN


BS05-24L(45.00"/240W)

23280lm · 1143.0*86.4*63.5mm · 2Pcs/CTN

BS05-26L(48.50"/260W)

25220lm · 1231.9*86.4*63.5mm · 2Pcs/CTN

BD07 Series

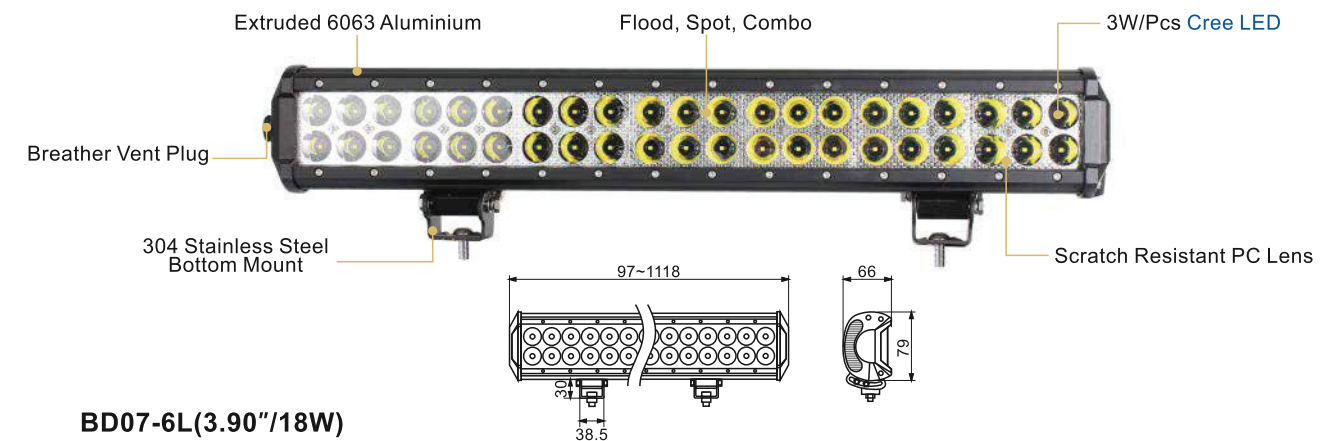

BD07-6L(3.90"/18W)

1560lm · 99.0*66.0*79.0mm · 20Pcs/CTN

BD07-12L(6.90"/36W)

3120lm · 175.2*66.0*79.0mm · 12Pcs/CTN

BD07-18L(9.50"/54W)

4680lm · 241.3*66.0*79.0mm · 12Pcs/CTN

BD07-24L(12.00"/72W)

6240lm · 304.8*66.0*79.0mm · 6Pcs/CTN

BD07-30L(14.50"/90W)

7800lm · 368.3*66.0*79.0mm · 6Pcs/CTN

BD07-36L(17.10"/108W)

9360lm · 434.3*66.0*79.0mm · 6Pcs/CTN

BD07-42L(20.00"/126W)

10920lm · 508.0*66.0*79.0mm · 6Pcs/CTN

BD07-48L(23.00"/144W)

12480lm · 584.2*66.0*79.0mm · 6Pcs/CTN

BD07-66L(31.00"/198W)

17160lm · 787.4*66.0*79.0mm · 4Pcs/CTN


BD07-78L(36.40"/234W)

20280lm · 924.5*66.0*79.0mm · 4Pcs/CTN

BD07-96L(45.50"/288W)

24960lm · 1188*66.0*79.0mm · 2Pcs/CTN

BD02 Series

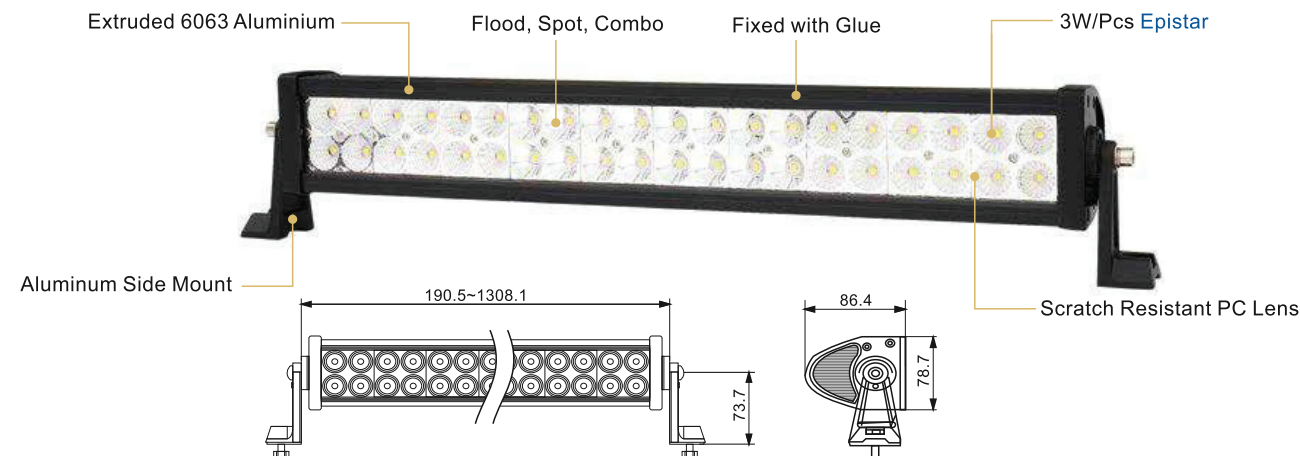

BD02-12L(7.50"/36W)

2880lm · 190.5*86.4*78.7mm · 6Pcs/CTN

BD02-20L(11.50"/60W)

4800lm · 292.1*86.4*78.7mm · 6Pcs/CTN

BD02-24L(13.50"/72W)

5760lm · 342.9*86.4*78.7mm · 6Pcs/CTN

BD02-40L(21.50"/120W)

9600lm · 546.1*86.4*78.7mm · 4Pcs/CTN

BD02-60L(31.50"/180W)

14400lm · 800.1*86.4*78.7mm · 4Pcs/CTN


BD02-80L(41.50"/240W)

19200lm · 1054.1*86.4*78.7mm · 4Pcs/CTN

BD02-100L(51.50"/300W)

24000lm · 1308.1*86.4*78.7mm · 4Pcs/CTN

BD03 Series

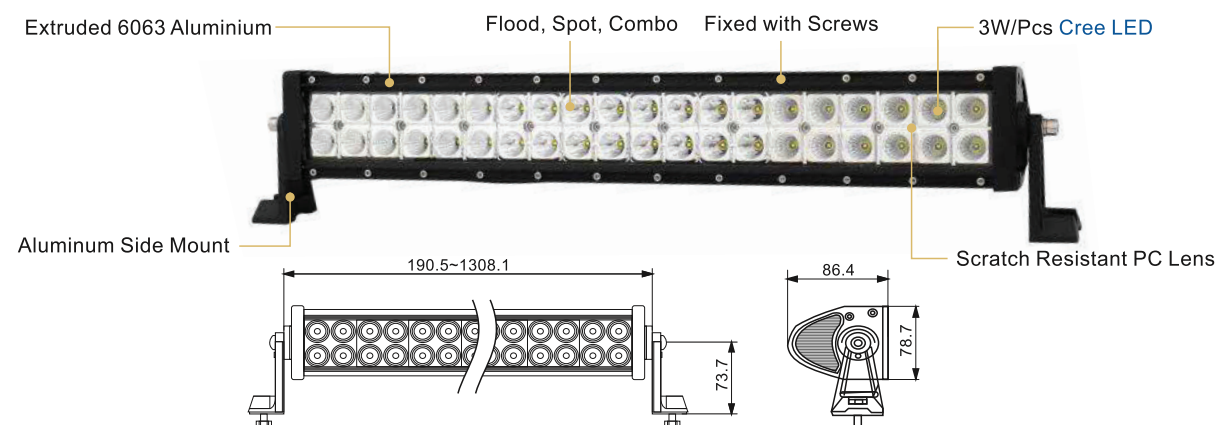

BD03-12L(7.50"/36W)

3120lm · 190.5*86.4*78.7mm · 6Pcs/CTN

BD03-20L(11.50"/60W)

5200lm · 292.1*86.4*78.7mm · 6Pcs/CTN

BD03-24L(13.50"/72W)

6240lm · 342.9*86.4*78.7mm · 6Pcs/CTN

BD03-40L(21.50"/120W)

10400lm · 546.1*86.4*78.7mm · 4Pcs/CTN

BD03-52L(27.40"/156W)

13520lm · 695.9*86.4*78.7mm · 4Pcs/CTN

BD03-60L(31.50"/180W)

15600lm · 800.1*86.4*78.7mm · 4Pcs/CTN

BD03-80L(41.50"/240W)

20800lm · 1054.1*86.4*78.7mm · 4Pcs/CTN


BD03-96L(49.50"/288W)

24960lm · 1257.3*86.4*78.7mm · 4Pcs/CTN

BD03-100L(51.50"/300W)

26000lm · 1308.1*86.4*78.7mm · 4Pcs/CTN

BD03A Series

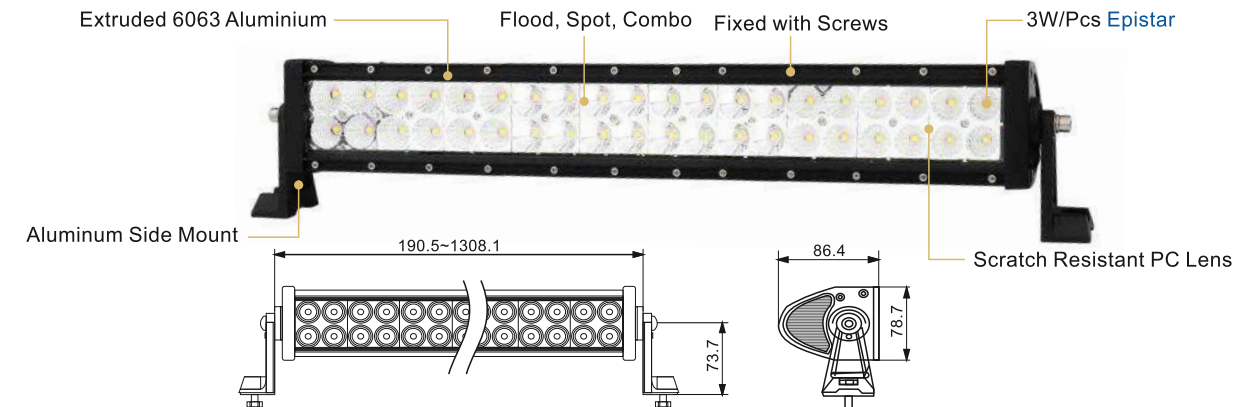

BD03A-12L(7.50"/36W)

2880lm · 190.5*86.4*78.7mm · 6Pcs/CTN

BD03A-20L(11.50"/60W)

5200lm · 292.1*86.4*78.7mm · 6Pcs/CTN

BD03A-24L(13.50"/72W)

6240lm · 342.9*86.4*78.7mm · 6Pcs/CTN

BD03A-40L(21.50"/120W)

10400lm · 546.1*86.4*78.7mm · 4Pcs/CTN

BD03A-52L(27.40"/156W)

13520lm · 695.9*86.4*78.7mm · 4Pcs/CTN

BD03A-60L(31.50"/180W)

15600lm · 800.1*86.4*78.7mm · 4Pcs/CTN

BD03A-80L(41.50"/240W)

20800lm · 1054.1*86.4*78.7mm · 4Pcs/CTN


BD03A-96L(49.50"/288W)

24960lm · 1257.3*86.4*78.7mm · 4Pcs/CTN

BD03A-100L(51.50"/300W)

26000lm · 1308.1*86.4*78.7mm · 4Pcs/CTN

BD04 Series

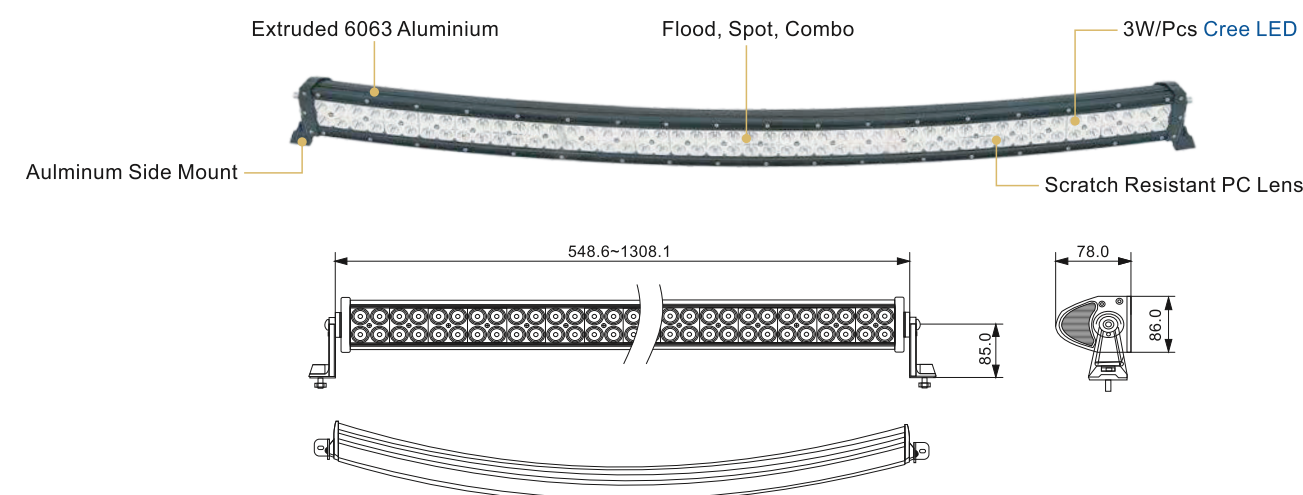

BD04-40L(21.60"/120W)

10400lm · 548.6*78.0*86.0mm · 4Pcs/CTN

BD04-60L(31.50"/180W)

15600lm · 800.1*78.0*86.0mm · 4Pcs/CTN

BD04-80L(41.50"/240W)

20800lm · 1054.1*78.0*86.0mm · 4Pcs/CTN


BD04-96L(49.50"/288W)

24960lm · 1257.3*78.0*86.0mm · 4Pcs/CTN

BD04-100L(51.50"/300W)

26000lm · 1308.1*78.0*86.0mm · 4Pcs/CTN

BD04A Series

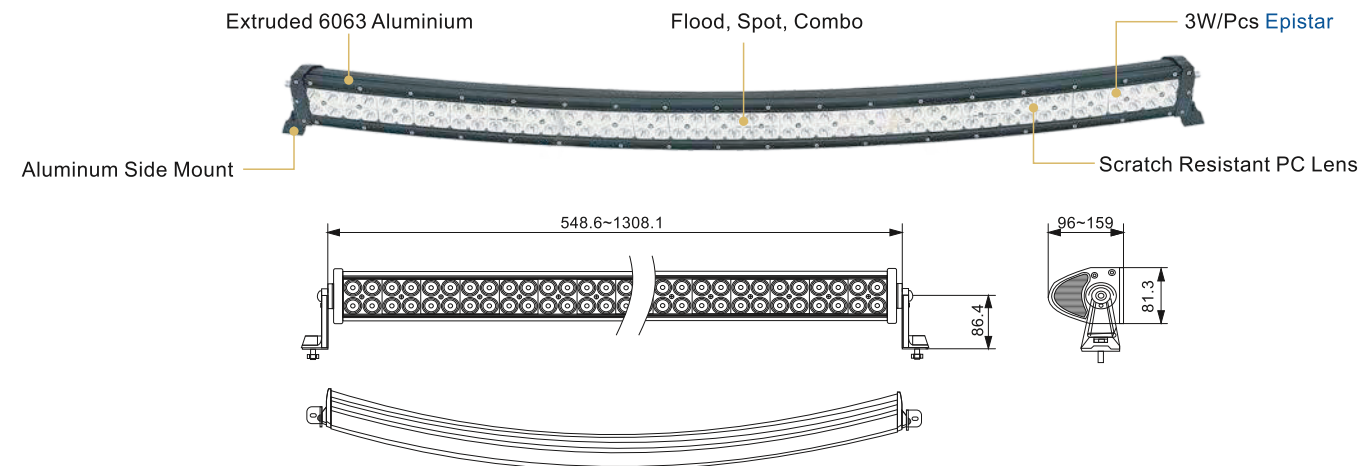

BD04A-40L(21.60"/120W)

9600lm · 548.6*96*81.3mm · 4Pcs/CTN

BD04A-60L(31.50"/180W)

14400lm · 800.1*104*81.3mm · 4Pcs/CTN

BD04A-80L(41.50"/240W)

19200lm · 1054.1*119*81.3mm · 4Pcs/CTN

BD04A-96L(49.50"/288W)

23040lm · 1257.3*152*81.3mm · 4Pcs/CTN

BD04A-100L(51.50"/300W)

24000lm · 1308.1*159*81.3mm · 4Pcs/CTN



AGRICULTURAL LED LIGHT

Long-lasting heavy-duty led lighting products are very important to agricultural equipment to maintain high operational productivity and safety in harsh operating conditions. We are developing a full range of agricultural led lights/headlights for Tractors, Combine, Harvesters, Harvest Equipment, Planting Equipment, Tillage Equipment, Hay and Forage Equipment, Chemical Applicators, Trailers, John Deere Equipment, Agco Equipment, Caterpillar Equipment, Case IH Equipment, New Holland Equipment, Kubota Equipment. As a manufacturer, we can provide customers great led agricultural lights with competitive price and stable quality.



A1401



Leds	Lumens	Beam Pattern	Size	Weight	Package Standard
5Pcs*10W Cree LED	4850lm	Flood	4.37**4.35**2.89"	0.70kg	20Pcs/Carton

Fit Models

Caterpillar Backhoe: 415F2ST, 416D, 416EST, 416F2ST, 416F2STLRC, 416FST, 420D, 420EIT, 420EST, 420F2IT, 420F2ITLRC, 420F2ST, 420F2STLRC, 420FIT, 420FST, 422E, 422F, 422F2STLRC, 424D, 427F2, 428D, 428E, 428F, 428F2, 428F2LRC, 430EIT, 430EST, 430F2IT, 430F2ITLRC, 430F2ST, 430F2STLRC, 430FIT, 430FST, 432D, 432E, 432F2, 432F2LRC, 434E, 434F, 434F2, 434F2LRC, 442D, 442E, 444E, 444F, 444F2, 444F2LRC, 446D, 450E, 450F
Caterpillar Excavator: 301.5, 301.6, 301.6C, 301.8, 301.8C, 302.5, 302.5C, 303.5E2CR, 303ECR, 304E2CR, 305.5E2CR, 305E2CR, 308E2CRSB, 320CLU, 320CU, 320DLRR, 320DRR, 345BII, 345BIIL, 345D, 345DL, 345DLVG, 349D, 349D2, 349D2L, 349DL, 349DLVG, 374DL, 375, 375L, 385BL, 390D, 390DL
Caterpillar Wheel Loader: 902, 906, 906H, 906H2, 906K, 906M, 907H, 907H2, 907K, 907M, 908, 908H, 908H2, 908K, 908M, 910K, 910M, 914G, 914G2, 914K, 914M, 918M, 924G, 924GZ, 924H, 924HZ, 924K, 926M, 928G, 928GZ, 928H, 928HZ, 930G, 930H, 930K, 930M, 938G, 938GII, 938H, 938K, 938M, 950G, 950GII, 950H, 950K, 962G, 962GII, 962H, 962K, 966G, 966GII, 966H, 966K, 966KXE, 972G, 972GII, 972H, 972K, 980GII, 980H, 980K, 980KOEM, 986H, 988G, 988H, 988K, 988KLRC, 990, 990H, 990K, 990KLRC, 992D, 992G, 992K, 992KLRC, 993K, 993KLRC, 993KLRC, 994F, 994H, 994KLRC, IT14G, IT14G2, IT28G, IT38G, IT38H, IT62G, IT62H
John Deere Backhoe: 310C, 310G, 310J, 310K, 310L, 310SG, 310SJ, 310SK, 310SL, 315SG, 315SJ, 315SK, 315SL, 325J, 325SK, 325SL, 210C, 315C, 315CH, 410C, 510C, 610C, 410B, 410G, 410J, 410K, 410L, 415B, 510B, 610B, 710B, 710C, 710J, 710K, 710L
John Deere Motor Grader: 670D, 670G, 670GP, 672D, 672G, 672GP, 770D, 770G, 770GP, 772D, 772G, 772GP, 870D, 870G, 870GP, 872D, 872G, 872GP
John Deere Wheel Loader: 210LE, 344E, 444D, 544D, 544E, 544G, 624E, 624G, 644D, 644E, 644G, 444E, 444J, 444K, 524K, 544J, 544K, 624J, 624K, 624KR, 644K, 724J, 724K, 744J, 744K, 755K, 824J, 824K, 844J, 844K, 850K, 944K
Komatsu Dump Truck: HM250-2, HM300-2, HM300-2R, HM300-3, HM300-3R, HM350-2R, HM400-2, HM400-2R, HM400-3M0
Komatsu Motor Grader: GD675-5
Komatsu Wheel Loader: WA1200-6, WA150-6, WA150PZ-6, WA200-6, WA250-6, WA250PZ-6, WA320-6, WA320PZ-6, WA380-6, WA380-7, WA380Z-6, WA430-6, WA470-6, WA470-6A, WA480-6, WA500-6, WA500-7, WA600-6, WA800-3E0, WA900-3E0



17206



Leds	Lumens	Beam Pattern	Size	Weight	Package Standard
10Pcs*5W Osram	3500lm	Flood	6.68**4.59**3.15"	0.56kg	12Pcs/Carton

Fit Models

John Deere Tractor: 5085M, 5090R, 5100E, 5100M, 5100MH, 5100R, 5115M, 6105R, 6110R, 6115R, 6120R, 6125R, 6130R, 6140R, 6145R, 6150R, 6150RH, 6155R, 6155RH, 6170R, 6175R, 6190R, 6195R, 6210R, 6215R, 7200R, 7210R, 7215R, 7230R, 7250R, 7260R, 7270R, 7280R, 7290R, 7310R, 8225R, 8235R, 8245R, 8260R, 8270R, 8285R, 8295R, 8295RT, 8310R, 8310RT, 8320R, 8320RT, 8335R, 8335RT, 8345R, 8360R, 8360RT, 8370R, 8370RT, 8400R, 9360R, 9370R, 9410R, 9420R, 9460R, 9460RT, 9470R, 9470RT, 9510R, 9510RT, 9520R, 9520RT, 9520RX, 9560R, 9560RT, 9570R, 9570RT, 9570RX, 9620R, 9620RX
John Deere Sprayer(s): R4023, R4030, R4038, R4045




15107



Leds	Lumens	Beam Pattern	Size	Weight	Package Standard
16Pcs*1W	2720lm	Flood	5.4"*2.5"*1.8"	0.35kg	20Pcs/Carton

Fit Models

John Deere Tractors: 4040, 4050, 4055, 4240, 4250, 4255, 4440, 4450, 4455, 4560, 4640, 4650, 4755, 4760, 4840, 4850, 4955, 4960, 6110, 6200, 6210, 6300, 6310, 6400, 6410, 6500, 7200, 7210, 7400, 7410, 7510, 7600, 7610, 7700, 7710, 7810, 8100, 8100T, 8110, 8110T, 8200, 8200T, 8210, 8210T, 8300, 8300T, 8310, 8310T, 8400, 8400T, 8410, 8410T
John Deere Crawler: 450H, 550H, 650H
John Deere Sprayer: 4700, 4710



A1801



Leds	Lumens	Beam Pattern	Size	Weight	Package Standard
10Pcs*4W Cree LED	3150lm	Flood, Spot Combo	8.01"*4.16"*4.65"	1.20kg	6Pcs/Carton

Fit Models

Case/IH: 3220, 3230, 395, 4210, 4230, 4240, 495, 5120, 5130, 5140, 5220, 5230, 5240, 5250, 565, 695, 895, 995
Case/IH C: 100, 50, 60, 70, 80, 90
Case/IH CX: 100, 50, 60, 70, 80, 90



A1601



Leds	Lumens	Beam Pattern	Size	Weight	Package Standard
12Pcs*4W Cree LED	3780lm	Flood	6.49"*4.11"*2.05"	0.62kg	20Pcs/Carton

Fit Models

AGCO Tractors: RT130, RT145
AGCO Allis Tractors: 6140, 9735, 9745
AGCO White Tractors: 8310, 8410
Challenger Tractors: MT455, MT465, MT465B, MT525B, MT535B, MT545B, MT555B, MT565B, MT575B, MT635B, MT645B, MT655B, MT665B
Massey Ferguson Tractors: 6140, 6150, 6170, 6180, 6190, 6260, 6270, 6280, 6290, 8110, 8120, 8130, 8140, 8150, 8160, 8260, 8270, 8280



A1802



Leds	Lumens	Beam Pattern	Size	Weight	Package Standard
18Pcs*4W Cree LED	5670lm	Flood, Spot Combo	7.60"*6.85"*2.96"	1.10kg	6Pcs/Carton

Fit Models

Bobcat Skid Steer: 553, 751, 753, 763, 773, 7753, 853, 863, 864, 873, 883, 943, 963, A250, A300, S100, S130, S150, S160, S175, S185, S205, S250, T110, T140, T180, T190, T250, T300, T320, T740, T750, T770, T870



A2701



Leds	Lumens	Beam Pattern	Size	Weight	Package Standard
13Pcs*3W Cree LED	3705lm	Flood	6.30"*4.33"*3.52"	0.68kg	20Pcs/Carton

Fit Models

Case/IH Combines: 5088, 6088, 7088, 7120, 7130, 7230, 8010, 8120, 8230, 9120, 9130, 9230
IH Cotton Picker: 625



A2501



Leds	Lumens	Beam Pattern	Size	Weight	Package Standard
8Pcs*3W Cree LED	3780lm	High beam(spot+flood)/ Low beam(flood)	4.39"*4.39"*1.80"	0.33kg	20Pcs/Carton

Fit Models

John Deere Tractors: 2155, 2350, 2355, 2355N, 2520, 2550, 2750, 2755, 2855N, 2940, 2950, 3040, 3140, 3150, 3155, 4000, 4020, 4030, 4040, 4230, 4240, 4320, 4430, 4450, 4620, 4630, 4650, 4850, 6030, 7020, 7520, 8430, 8440, 8450, 8630, 8640, 8650, 8850
John Deere Sprayer: 6100, 6500, 6600, 6700
John Deere Combine: 3300, 4400, 4420, 6600, 6602, 6620, 6622, 7700, 7720, 8820
John Deere Cotton Picker: 9900, 9910, 9920, 9930, 9940, 9950



A2502



Leds	Lumens	Beam Pattern	Size	Weight	Package Standard
6Pcs*3W Cree LED	1560lm	Flood/Trapezoid	4.39"*4.39"*1.80"	0.33kg	20Pcs/Carton

Fit Models

Allis Chalmers Tractors: 160, 170, 175, 180, 185, 190, 200, 210, 6040, 6060, 6070, 6080, 7000, 7010, 7020, 7030, 7040, 7045, 7050, 7060, 7080 70239804, 70230232

Case Backhoe:26, 33, 34, 265, 780, 26B, 480C, 480D, 480E, 480ELL, 480F, 480LL, 580C, 580D, 580SD, 580SE, 680E, 680G, 680H, 780B, 780C

Case Crawler Tractor: 420, 1450, 1550, 1150B, 1150C, 1150D, 1150E, 1155D, 1155E, 1450B, 1455B, 310C, 310D, 420B, 420C, 450B, 455B, 850B, 850C, 850D, 855C, 855D

Case Forklift: 530, 584C, 584D, 585C, 585D, 586C, 586D

Caterpillar Cold Planner: PR-1000

Case Tractor: 1190, 1290, 1390, 1490, 1690, 2090, 2290, 2390, 2590, 4490, 4690, 4890, 320B, 420B, 420DB, 480B, W10E, W8E, W9, W9E

Caterpillar Compactor: 815B

Caterpillar Motor Grader: 120G, 140G

Caterpillar Of Highway Truck: 797, 776C, 776D, 777C, 777D, 784B, 784C, 785B, 785C, 785D, 785DOEM, 789B, 789C, 793B, 793C, 793D, 797B, MT4400DAC

Caterpillar Wheel Loader: 950H, 966H, 972G, 972H, 972K, 972M, 980F, 980G, 980GII, 980H, 980K, IT12F

Ford New Holland Tractor: 233, 333, 2000, 2100, 2110, 2120, 2150, 2300, 2310, 2600, 3000, 3055, 3100, 3110, 3120, 3150, 3300, 3310, 3330, 3400, 3500, 3550, 3600, 3900, 4000, 4100, 4110, 4140, 4200, 4330, 4340, 4400, 4410, 4500, 4600, 5000, 5100, 5200, 5340, 5600, 5700, 6600, 6700, 6710, 7000, 7100, 7200, 7600, 7700, 7710, 7910, 8000, 8210, 8600, 8700, 9000, 9600, 9700, 2600N, 2600R, 2600V, 3600N, 3600NO, 3600R, 3600V, 4600NO, 4600O, 4600SU, 6600C, 6600O, 7600C, TW10, TW15, TW20, TW25, TW30, TW35, TW5

International Tractor: 544, 656, 666, 686, 706, 756, 766, 786, 806, 826, 856, 886, 966, 986, 1026, 1066, 1086, 1206, 1256, 1456, 1466, 1468, 1486, 1566, 1568, 3088, 3288, 3388, 3488, 3588, 3688, 3788, 5088, 5288, 5488

John Deere Backhoe: 310, 410, 510, 300B, 302A, 310A, 310B, 401C, 410B, 415B, 500A, 500B, 500C, 510B, 515B, 610B, 700A, 710B, 710C, 760A

John Deere Combine: 3300, 4400, 4420, 6600, 6602, 6620, 6622, 7700, 7720, 7721, 8820

John Deere Crawler Dozer: 550, 450D, 450E, 550A, 550B, 555, 455D, 455E, 555A, 555B

John Deere Crawler Loader: 555, 455D, 455E, 555A, 555B

John Deere Forklift: 380, 480, 480A, 480B, 480C

John Deere Skidder: 740

John Deere Log Skidder: 440, 540, 640, 340D, 440A, 440B, 440C, 440D, 448D, 540A, 540B, 540D, 548D, 740A

John Deere Skid Steer: 14, 24, 70, 125, 170, 375, 570, 575, 675, 3375, 24A, 675B

John Deere Tractor: 2010, 2040, 2240, 2510, 2520, 2840, 2940, 3010, 3020, 4000, 4010, 4020, 4030, 4040, 4050, 4055, 4230, 4240, 4250, 4255, 4320, 4430, 4440, 4450, 4455, 4520, 4555, 4560, 4620, 4630, 4640, 4650, 4755, 4760, 4840, 4850, 4955, 4960, 5010, 5020, 6030, 7020, 7520, 8440, 8450, 8560, 8570, 8630, 8640, 8650, 8760, 8770, 8850, 8870, 8960, 8970, 9100, 9200, 9300, 9400

John Deere Wheel Loader: 302, 444, 544, 301A, 401B, 444C, 444CH, 544A, 544B, 544C, 644A, 644B, 644C

Massey Ferguson: 10, 20, 30, 31, 40, 50, 60, 70, 80, 135, 150, 165, 175, 180, 230, 240, 245, 250, 255, 270, 275, 285, 290, 298, 1080, 1085, 1100, 1105, 1130, 1135, 1150, 1155, 1500, 1505, 1800, 1805, 2640, 2675, 2705, 2745, 2775, 2805, 3505, 3525, 3545

Blue Boom Sprayer Light

We manufacture high quality blue LED sprayer boom lights which are specifically designed for crop sprayer equipment ensuring a ful visibility of the end of the nozzles and enabling end users to view the chemicals are being spread. The eye catching 475nm; Wavelength blue boom sprayer led spot light create a high lumen output in a concentrated short area which can work no matter in day or night. Our blue LED sprayer safety light is rigorously tested to achieve IP68 rating, equipped with restless 316 stainless steel bracket protecting against the moisture and chemicals effect from the sprayer nozzles.



A1402



Leds	Wavelength	Beam Pattern	Size	Beam Angle	Package Standard
9Pcs*5W Cree LED Blue	465nm	Spot	3.98"*3.62"*2.58"	10°	20Pcs/Carton



A2401



Leds	Wavelength	Beam Pattern	Size	Beam Angle	Package Standard
9Pcs*5W Cree LED Blue	465nm	Spot	3.94"*3.94"*2.44"	10°	20Pcs/Carton



15105



Leds	Wavelength	Beam Pattern	Size	Beam Angle	Package Standard
16Pcs*3W Cree LED Blue	475nm	Spot	4.53"*4.53"*3.54"	20°	12Pcs/Carton



16205



Leds	Wavelength	Beam Pattern	Size	Beam Angle	Package Standard
9Pcs*5W Cree LED Blue	450nm	Spot	5.50"*5.50"*3.50"	10°	6Pcs/Carton



CATALOG 2025



ISO 9001
ISO 14001
ISO 45001
IATF 16949



Intertek



Intertek